



NEW

LINEO RANGE

In-line mixed flow fans





VORTICE S.p.A. is now part of a multinational group, the **VORTICE GROUP**, which operates through its own companies or local distributors in over 90 countries worldwide and has a rich product portfolio that guarantees air quality and climate comfort. The headquarters of VORTICE S.p.A are in Tribiano (Milan).



The VORTICE GROUP also includes:

[1]

VORTICE UK Ltd, English branch of VORTICE S.p.A. established in 1977 and based in Burton on Trent.

[2]

VORTICE INDUSTRIAL, created in 2010 through the acquisition of Loran srl, based in Isola della Scala (VR - Italy).

[3]

VORTICE Ventilation System, a company inaugurated in 2013 with headquarters in Changzhou, China.

[4]

VORTICE Latam, based in San José in Costa Rica, born in 2012.

[5]

CASALS historic Spanish brand of VENTILACIÓN INDUSTRIAL IND. S.L., based in Sant Joan de les Abadesses, Girona, acquired in 2019.



INDEX

Page 05

LINEO RANGE features and strengths

Page 12

LINEO QUIET ES RANGE

In-line mixed flow fans equipped with EC Brushless motors



Page 18

LINEO QUIET RANGE

In-line mixed flow fans equipped with AC motors


Page 24

LINEO and LINEO ES RANGE features and strengths

Page 28

LINEO RANGE

In-line mixed flow fans equipped with AC motors

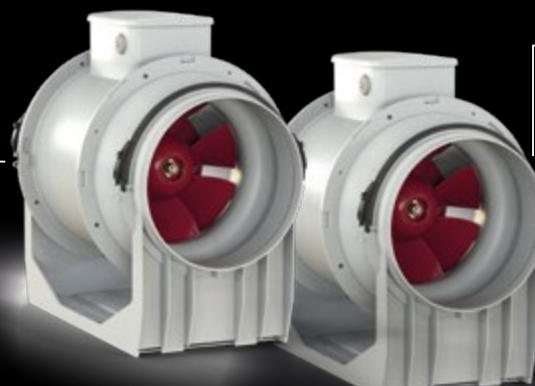

Page 34

LINEO ES RANGE

In-line mixed flow fans equipped with EC Brushless motors

Certifications

The LINEO range products are CE marked per the Directives and regulations listed below. They have IMQ certification for compliance with the safety and electromagnetic compatibility directives listed below.

Relevant Directive and regulations for the CE Marking

- Machinery Directive (2006/42/CE)
- Low Voltage Directive (2014/35/EU)
- Electromagnetic Compatibility Directive (2014/30/EU)
- Ecodesign Directive (2009/125/EC)
- RoHS Directive (2011/65/EU)
- WEEE Directive (2012/19/EU)
- ERP Regulation No. 327/2011/EU - 1253/2014/EU

Electrical safety regulations

- EN 60335-1
- EN 60335-2-80
- EN 62233
- EN 60529

Regulations associated with the Machinery Directive

- EN 60204-1
- EN 12100
- EN 12499
- EN 13857

Electromagnetic compatibilityRegulations

- EN 55014-1
- EN 55014-2
- EN 61000-3-2
- EN 61000-3-3

LINEO RANGE

In-line mixed flow fans

The LINEO range products are “mixed flow” fans specifically designed for horizontal or vertical installation in conduit for

**VENTILATION OF RESIDENTIAL,
COMMERCIAL OR INDUSTRIAL PREMISES.**



They all have high levels of energy efficiency and meet the requirements of ERP Regulation 327/2011/EU ERP 1253/2014/EU and new versions proposed for implementation from 2022. The fans in the renewed LINEO range boast

HIGH PERFORMANCE, LOW ENERGY CONSUMPTION, LOW NOISE EMISSIONS AND EASE OF INSTALLATION AND MAINTENANCE

placing them at the top of the category.

The LINEO range products are characterised by technopolymer enclosures for increased fire resistance safety class E2, according to EN ISO 11925-2:2010 and have a high degree of protection against water (IPX5) the classification only applies to a properly installed product

THE DESIGN

CONSTRUCTION FEATURES COMMON TO THE RANGE

The design consists of the following:

- a central motor mount which encloses the fan motor unit and houses the wiring devices externally, in an easily reachable position;
- the main body, fixed to a pair of end supports arranged for connection to the suction and delivery pipes, which is designed to rotate on its own axis to facilitate the housing of the product in small spaces and its wiring through the contacts positioned on its external surface; The ease with which it can be removed without altering the surrounding piping system, greatly speeds up and facilitates maintenance;

- the air flow rectifiers on the delivery side work in synergy with the upstream impeller, optimise the managed air flow, maximising performance and increasing efficiency, reducing the occurrence of vortices and minimising noise emissions;
- the mixed flow type impellers, combine the advantages of helical fans (high flow rates and flow around the axis of the impeller), with the high pressures of centrifugal fans; the directly coupled motors have shafts mounted on ball bearings, ensuring a virtually “maintenance free” operation;
- the timer in the T models allows the operation of the appliance to be programmed at maximum speed and ease at a range between 3' and 20', which can be set during installation.

STRENGTHS:

- high-performance, top-of-the-range;
- easy maintenance. Each component allows easy connection and disconnection with the nearby elements, and easy access to the inner components (motor-impeller) and their replacement. In the case of silenced products, the sound absorbing shells refitted at the end of the maintenance process, restore the original sound performance under test conditions;

- the motors have a minimum guaranteed life in continuous operation at maximum speed and at maximum ambient temperature of 30,000 or 40,000 hours depending on the type;
- completeness of the range, designed to offer the ideal product to meet the specific requirements of the system in terms of performance, consumption, quiet operation, operating costs and purchase price.

LINEO QUIET RANGE

In-line mixed flow fans

The **LINEO QUIET** range products are characterised by the use of a **sound-absorbing coating**, which is fully integrated in the outer casing and optimised to minimise environmental sound emissions.

**HIGH-LEVEL PERFORMANCE,
AT THE TOP OF THE RANGE.**



NEW

LINEO QUIET RANGE

In-line mixed flow fans



because energy
has to be....

SAVED

A close-up, low-angle shot of the blades of an in-line fan. The blades are dark grey and curve outwards from a central hub. The background is blurred, showing more of the fan's structure.

The impeller profiles,
the flow rectifiers and ogival profile
of the flow driver work in synergy with
the upstream impeller optimise the
managed air flow, maximising performance
and increasing efficiency, reducing
the occurrence of vortices and
minimising noise
emissions.

because silence
has to be....

BUILT

IMPELLER

Designed to reach the ERP efficiency levels

CO-MOULDED SHELL

Easily removable during maintenance without any effect on his sound dampening effect

INLET NOZZLE

Dimensioned to sustain the product in the wall and ceiling installation



DIVERGENT ELEMENT

It helps the impeller to increase the performance

NEW


LINEO QUIET RANGE

In-line mixed flow fans



ELECTRIC BOX

Produced in a material granting electrical and fire resistance

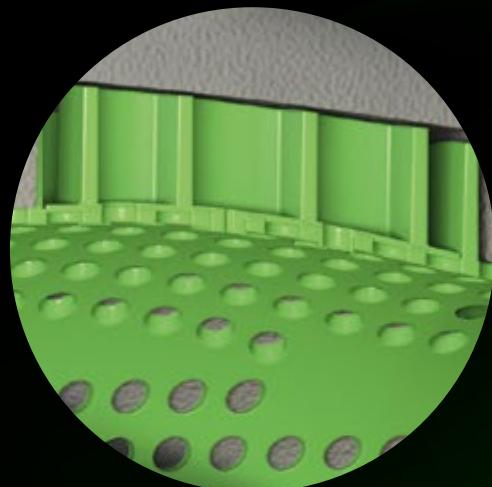

HELMHOLTZ RESONATOR GROUP

Passive sound dampener used to decreased the noise levels at predetermined frequencies

FLOW DRIVER

It corrects the airflow after the impeller and the rectifier, avoiding energy losses due to vortexes

CO-MOULDED SHELL

Easily removable during maintenance without any effect on his sound dampening effect

RECTIFIER BLADES

Designed with the impeller to rectify the airflow and avoid flow problems on the downstream part of the product

LINEO QUIET ES RANGE

equipped with EC brushless motors

The products in the LINEO QUIET ES range differ from the corresponding versions of the LINEO QUIET range due to the use of electronically controlled brushless (low consumption) motors.



LINEO QUIET RANGE

equipped with AC motors



The LINEO QUIET range products are fitted with traditional AC motors.

NEW

LINEO QUIET RANGE

In-line mixed flow fans



because environment
has to be....

SUSTAINED





LINEO QUIET ES RANGE

NEW

In-line mixed flow fans equipped with EC Brushless motors

TECHNICAL AND PERFORMANCE DATA - LINEO QUIET ES

Models	Code	V~50/60HZ	W		RPM		Max Airflow		Max Pressure		Max °C	KG
			4/6/8/10V	4/6/8/10V	4/6/8/10V	4/6/8/10V	m³/h	l/s	mmH ₂ O	Pa		
LINEO 100 QUIET ES	17170	220-240	6.2	0.09	1140	135	37.5	3.5	34.3	56.9	60	3,8
			8.3	0.12	1450	175	48.6	5.8	11.4	111.8		
			14.7	0.18	2050	250	69.4	24.8	243.2	243.2		
			23	0.26	2510	300	83.3					
LINEO 125 QUIET ES	17171	220-240	6.6	0.10	1080	180	50	3.3	32.4	54.9	60	3,6
			8.8	0.12	1340	225	62.5	5.6	11	107.9		
			16	0.18	1865	320	88.9	11	232.4	232.4		
			24	0.26	2210	380	105.6	23.7				
LINEO 150 QUIET ES	17172	220-240	7.7	0.11	1015	250	69.4	4.6	45.1	73.6	60	5,4
			10.6	0.14	1240	305	84.7	7.5	14.7	107.9		
			20	0.24	1700	430	119.4	14.7	237.3	237.3		
			31	0.34	2030	515	143.1	24.2				
LINEO 160 QUIET ES	17173	220-240	7.7	0.11	1010	250	69.4	4.5	44.1	73.6	60	5,2
			10.6	0.14	1245	315	87.5	7.5	14.4	141.2		
			19.7	0.23	1685	435	120.8	14.4	234.4	234.4		
			31	0.34	2035	525	145.8	23.9				
LINEO 200 QUIET ES	17174	220-240	15.2	0.18	1380	570	158.3	8.6	84.3	136.3	50	8,6
			25.3	0.27	1705	720	200	13.9	22.9	224.6		
			52.4	0.52	2245	945	262.5	22.9	329.5	329.5		
			88	0.78	2700	1145	318.1	33.6				
LINEO 250 QUIET ES	17175	220-240	20	0.19	1365	750	208.3	10.1	99.1	153	50	13,4
			35	0.28	1680	940	261.1	15.6	26.6	260.9		
			75	0.60	2250	1250	347.2	26.6	367.8	367.8		
			125	0.97	2680	1485	412.4	37.5				
LINEO 315 QUIET ES	17176	220-240	42	0.31	1260	1400	388.9	12.9	126.5	191.2	50	28,3
			72	0.51	1560	1730	480.6	19.5	191.2	331.5		
			155	1.10	2070	2300	638.9	33.8	331.5	379.5		
			220	1.52	2350	2630	730.6	38.7	379.5			

SOUNDS LEVELS - LINEO QUIET ES

Calculated in free field conditions at 3 m distance

SOUND LEVEL Lw dB (A)

Models	Code	INTAKE				SUPPLY				IRRADIATED			
		4V	6V	8V	10V	4V	6V	8V	10V	4V	6V	8V	10V
LINEO 100 QUIET ES	17170	64.8	72.4	77.5	79.1	64.5	73.2	75.6	79	38.1	46.2	46.5	47.9
LINEO 125 QUIET ES	17171	63.7	71	75.8	78.3	64.3	73.5	74.7	79.4	42.3	48.5	51	51.7
LINEO 150 QUIET ES	17172	65.5	72.1	75	76.9	66	72.8	75.6	76.7	40.7	45.8	49.6	50.8
LINEO 160 QUIET ES	17173	65.5	72.1	75	76.9	66	72.8	75.6	76.7	40.7	45.8	49.6	50.8
LINEO 200 QUIET ES	17174	74.8	80	82.6	84.7	72.4	77.6	80.5	83.6	49.9	54.4	56.9	59.1
LINEO 250 QUIET ES	17175	71.4	76.7	83.7	88.1	70.7	76.1	83	87.2	44.4	49.1	55.9	60
LINEO 315 QUIET ES	17176	82.6	85.7	88.3	89.1	73.3	80.6	82.2	84.5	55.9	62.3	64.7	65.3

SOUND PRESSURE LP dB(A)

Models	Code	INTAKE				SUPPLY				IRRADIATED			
		4V	6V	8V	10V	4V	6V	8V	10V	4V	6V	8V	10V
LINEO 100 QUIET ES	17170	47.3	54.9	59.9	61.5	47	55.7	25.9	47	17.6	25.6	25.9	27.4
LINEO 125 QUIET ES	17171	46.1	53.4	58.3	60.8	46.8	56	57.2	61.9	21.8	28	30.4	31.3
LINEO 150 QUIET ES	17172	48	54.6	57.4	59.4	49	55.3	58.1	59.1	20.2	25.3	29.1	30.2
LINEO 160 QUIET ES	17173	48	54.6	57.4	59.4	49	55.3	58.1	59.1	20.2	25.3	29.1	30.2
LINEO 200 QUIET ES	17174	57.3	62.4	65.1	67.1	54.8	60.1	63	66.1	29.4	33.9	36.4	38.6
LINEO 250 QUIET ES	17175	53.9	59.2	66.1	70.5	52	58.6	65.5	69.7	23.8	28.6	35.4	39.5
LINEO 315 QUIET ES	17176	65.1	68.2	70.8	71.6	55.8	63.1	64.6	67	35.4	41.8	44.1	44.8

NEW

LINEO QUIET ES RANGE




In-line mixed flow fans equipped with EC Brushless motors

**DIMENSIONS - LINEO QUIET ES**




Models	Code	A	B	C	$\varnothing D$	E	F	G	H	L	$\varnothing M$	N	VERSION
LINEO 100 QUIET ES	17170	210	294.6	639	97	130	235	135	120	67.5	5.5	320	A
LINEO 125 QUIET ES	17171	210	294.6	504.5	122	130	235	135	120	67.5	5.5	320	A
LINEO 150 QUIET ES	17172	232	320.6	685	147	145	261.5	170	132	85	5.5	360	A
LINEO 160 QUIET ES	17173	232	320.6	570	156.5	145	261.5	170	135	85	5.5	360	A
LINEO 200 QUIET ES	17174	322.5	417.6	625.5	194.5	195	363.5	190	120	155	5.5	510	B
LINEO 250 QUIET ES	17175	318	411.9	751.5	243	189.5	363.5	200	70	170	6.5	604.5	B
LINEO 315 QUIET ES	17176	415.5	557.8	940	307	234	441	309	110	255	8.5	780	C

VERSION A



LINEO 100 QUIET ES - LINEO 125 QUIET ES - LINEO 150 QUIET ES - LINEO 160 QUIET ES

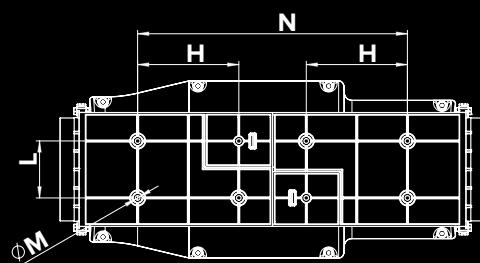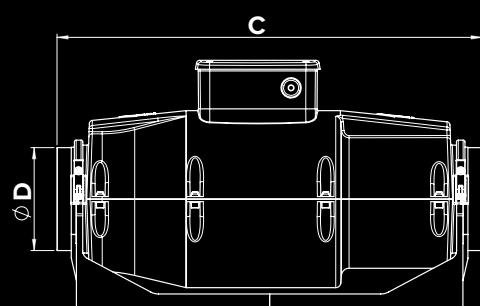**VERSION B**

LINEO 200 QUIET ES - LINEO 250 QUIET ES

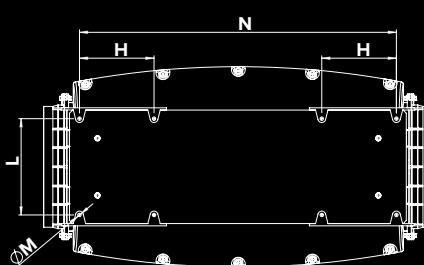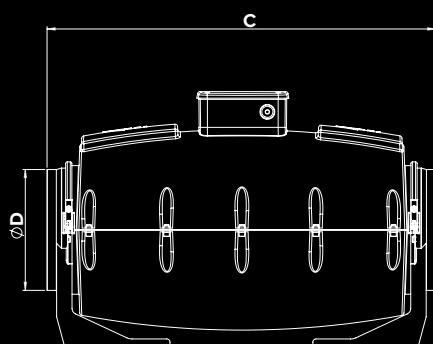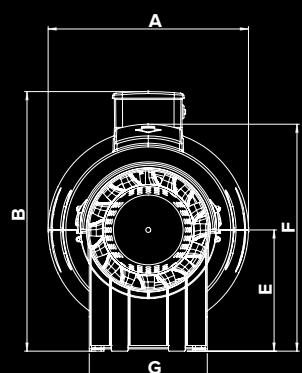**VERSION C**

LINEO 315 QUIET ES

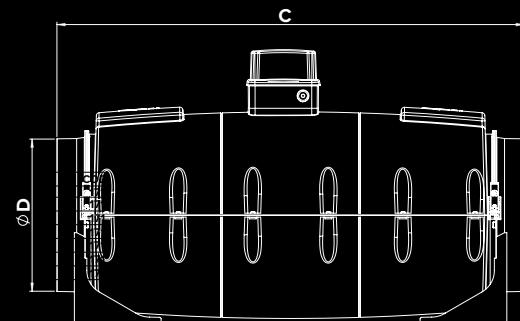




LINEO QUIET ES RANGE

NEW


In-line mixed flow fans equipped with EC Brushless motors

PERFORMANCE AND ABSORPTION CURVES - LINEO QUIET ES


LINEO 100 QUIET ES

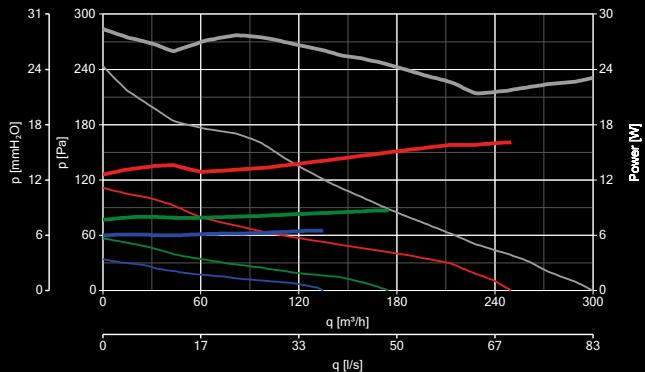


LINEO 125 QUIET ES

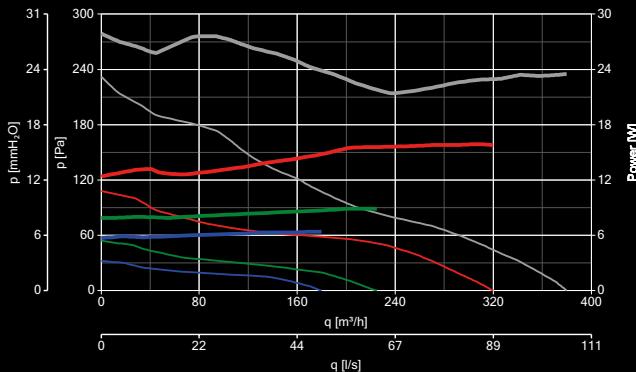


LINEO 150 QUIET ES

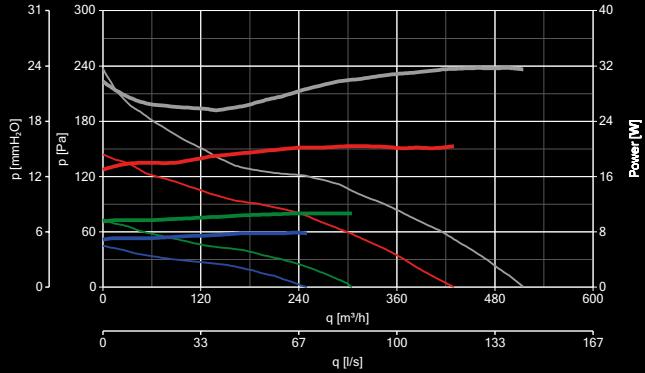


LINEO 160 QUIET ES

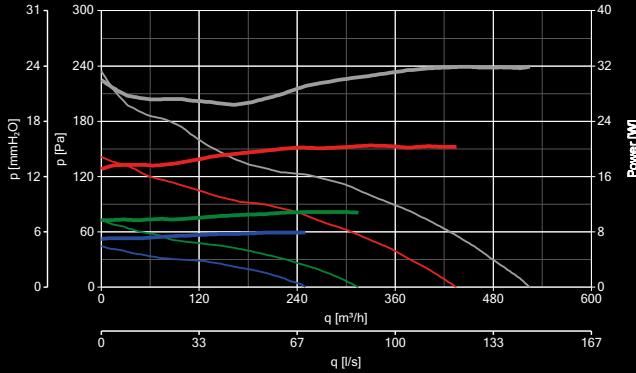


LINEO 200 QUIET ES

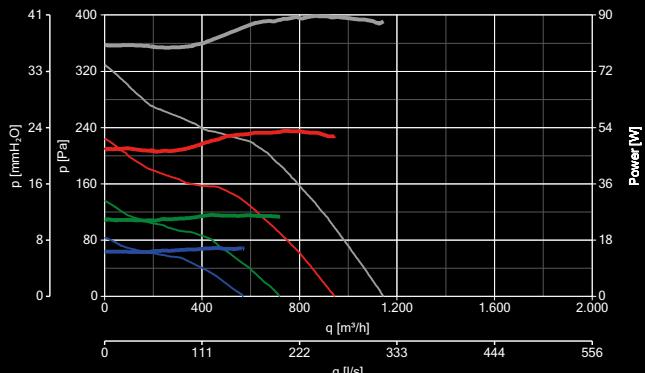

LINEO 250 QUIET ES

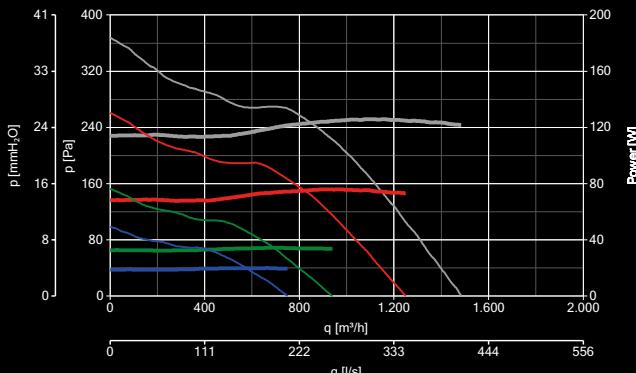

LINEO 315 QUIET ES

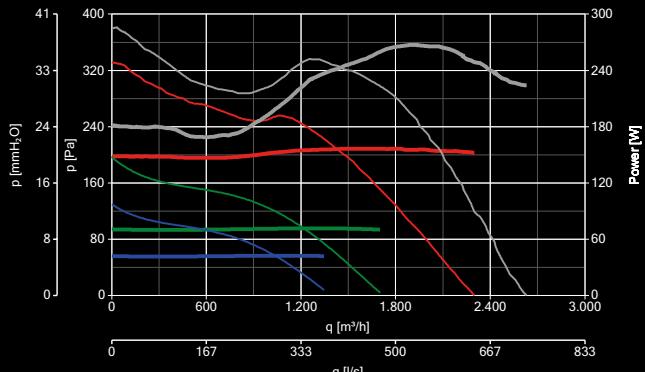

CONSUMPTION	PERFORMANCE
10V	10V
8V	8V
6V	6V
4V	4V

NEW

LINEO QUIET ES RANGE

In-line mixed flow fans equipped with EC Brushless motors



CONTROLLERS - LINEO QUIET ES

MODELS	DESCRIPTION	CODE	PRODUCT
	POT-IT - POTENTIOMETER	12826	17170 - 17171 - 17172 - 17173 - 17174 17175 - 17176
	POT - POTENTIOMETER	12828	17170 - 17171 - 17172 - 17173 - 17174 17175 - 17176
	C TEMP - THERMO SWITCH	12992	ALL PRODUCTS
	C SMOKE - AIR QUALITY SENSOR	12993	ALL PRODUCTS
	C HCS - HUMIDISTAT	12994	ALL PRODUCTS
	C PIR - PASSIVE INFRARED SENSOR	12998	ALL PRODUCTS
	C TIMER - TIMER	12999	ALL PRODUCTS







LINEO QUIET RANGE NEW

In-line mixed flow fans equipped with AC motors

TECHNICAL AND PERFORMANCE DATA - LINEO QUIET

Models	Code	V~50/60 Hz	W min/med/ max	A min/med/ max	RPM min/med/ max	Max Airflow		Max Pressure		Max °C	KG
						m³/h min/med/max	l/s min/med/max	mmH ₂ O min/med/max	Pa min/med/max		
LINEO 100 QUIET	17160		11	0.09	1455	150	41.7	9	88.3		
		220-240	24	0.11	1880	200	55.6	11.5	112.8	45	3,8
LINEO 100 T QUIET	17190		27	0.13	2260	260	72.2	15	147.1		
LINEO 125 QUIET	17161		11	0.09	1125	190	52.8	8	78.5		
		220-240	24	0.11	1475	250	69.4	10	98.1	45	3,6
LINEO 125 T QUIET	17191		27	0.13	1880	320	88.9	14	137.3		
LINEO 150 QUIET	17162		24	0.14	1040	255	70.8	10.5	103		
		220-240	37	0.17	1430	350	97.2	15.5	152	55	5,4
LINEO 150 T QUIET	17192		50	0.22	2030	510	141.7	21.5	210.9		
LINEO 160 QUIET	17163		24	0.14	1040	255	70.8	10.5	103		
		220-240	37	0.17	1430	350	97.2	15.5	152	55	5,2
LINEO 160 T QUIET	17193		50	0.22	2030	510	141.7	21.5	210.9		
LINEO 200 QUIET	17164		50	0.34	1880	805	223.6	20.6	202		
		220-240	80	0.42	2380	1045	290.3	26.3	257.9	50	8,6
LINEO 200 T QUIET	17194		95	0.49	2690	1160	322.2	29	284.4		
LINEO 250 QUIET	17165	220-240	125	0.55	2320	1340	372.2	30.3	297.2	50	13,4
			150	0.65	2750	1550	430.6	34.6	339.3		
LINEO 315 QUIET	17166	220-240	215	0.95	1930	2070	575	30.6	300.1		
			270	1.15	2360	2530	702.8	43.3	424.6	50	28,3
			360	1.55	2705	2890	802.8	53.6	525.7		

SOUNDS LEVELS - LINEO QUIET

Calculated in free field conditions at 3 m distance

Models	Code	INTAKE			SUPPLY			IRRADIATED		
		min	med.	max	min	med.	max	min	med.	max
LINEO 100 QUIET	17160	62.2	70.5	74.6	62.3	68.7	74.4	36.2	41.8	46.6
LINEO 100 T QUIET	17190									
LINEO 125 QUIET	17161	60.1	64.2	70.4	60.5	64.2	70.9	36.2	41.8	45.5
LINEO 125 T QUIET	17191									
LINEO 150 QUIET	17162	60.3	68.2	77.3	62.1	67.7	76	38.2	43.4	51.2
LINEO 150 T QUIET	17192									
LINEO 160 QUIET	17163	60.3	68.2	77.3	62.1	67.7	76	38.2	43.4	51.2
LINEO 160 T QUIET	17193									
LINEO 200 QUIET	17164	76.9	83.3	86.4	75.1	81.5	85	51.6	57.4	60.7
LINEO 200 T QUIET	17194									
LINEO 250 QUIET	17165	76.3	83.6	85.1	75	83.4	87.4	49.5	57	60.7
LINEO 315 QUIET	17166	82.8	87	91.7	82.8	87	89.8	58.8	62.9	65.9

SOUND PRESSURE LP dB(A)

Models	Code	INTAKE			SUPPLY			IRRADIATED		
		min	med.	max	min	med.	max	min	med.	max
LINEO 100 QUIET	17160	44.6	52.9	57.1	44.8	51.2	56.9	15.7	21.3	26.1
LINEO 100 T QUIET	17190									
LINEO 125 QUIET	17161	42.6	46.7	52.9	43	46.6	53.4	15.6	21.1	25
LINEO 125 T QUIET	17191									
LINEO 150 QUIET	17162	42.8	50.7	59.7	44.5	50.1	58.5	17.6	22.9	30.7
LINEO 150 T QUIET	17192									
LINEO 160 QUIET	17163	42.8	50.7	59.7	44.5	50.1	58.5	17.6	22.9	30.7
LINEO 160 T QUIET	17193									
LINEO 200 QUIET	17164	59.3	65.8	68.8	57.6	64	67.5	31	36.9	40.2
LINEO 200 T QUIET	17194									
LINEO 250 QUIET	17165	58.8	67.6	71.5	57.5	65.9	69.9	29	36.5	40.1
LINEO 315 QUIET	17166	66.8	71	74.2	65.3	69.5	72.3	38.3	42.4	45.4

NEW

LINEO QUIET RANGE


In-line mixed flow fans equipped with AC motors

**DIMENSIONS - LINEO QUIET**


Models	Code	A	B	C	Ø D	E	F	G	H	L	Ø M	N	VERSION
LINEO 100 QUIET	17160		210	294.5	639	97	130	235	135	120	67.5	5.5	320
LINEO 100 T QUIET	17190												A
LINEO 125 QUIET	17161		210	294.6	504.5	122	130	235	135	120	67.5	5.5	320
LINEO 125 T QUIET	17191												A
LINEO 150 QUIET	17162		232	320.5	685	147	145	261.5	170	132	85	5.5	360
LINEO 150 T QUIET	17192												A
LINEO 160 QUIET	17163		232	320.5	570	156.5	145	261.5	170	135	85	5.5	360
LINEO 160 T QUIET	17193												A
LINEO 200 QUIET	17164		322.5	417.5	625.5	194.5	195	363.5	190	120	155	5.5	510
LINEO 200 T QUIET	17194												B
LINEO 250 QUIET	17165		318	412	751.5	243	189.5	363.5	200	70	170	6.5	604.5
LINEO 315 QUIET	17166		415.5	496.5	940	307	244	441	309	110	255	8.5	780
													B

VERSION A

LINEO 100 QUIET - LINEO 100 T QUIET - LINEO 125 QUIET - LINEO 125 T QUIET
 LINEO 150 QUIET - LINEO 150 T QUIET - LINEO 160 QUIET - LINEO 160 T QUIET

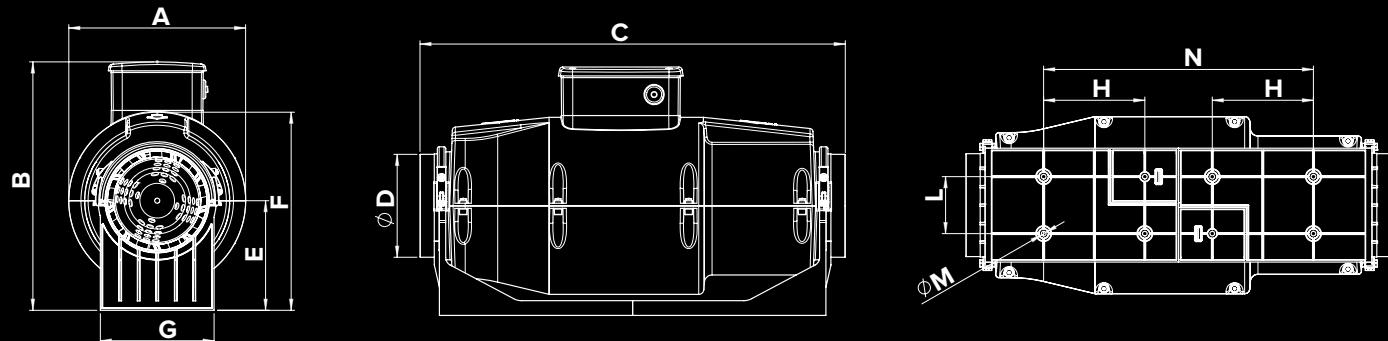**VERSION B**

LINEO 200 QUIET - LINEO 200 T QUIET - LINEO 250 QUIET - LINEO 315 QUIET

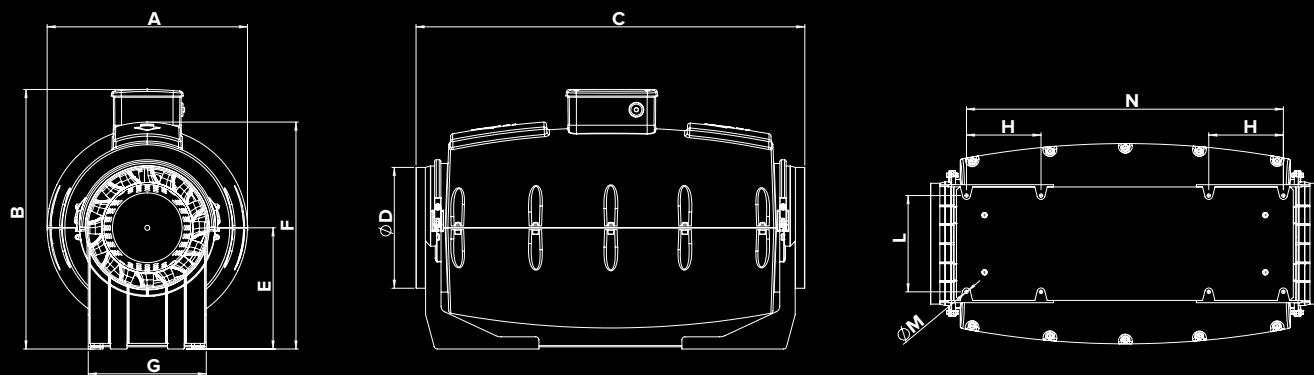




LINEO QUIET RANGE NEW


In-line mixed flow fans equipped with AC motors

PERFORMANCE AND ABSORPTION CURVES - LINEO QUIET


LINEO 100 QUIET - LINEO 100 T QUIET

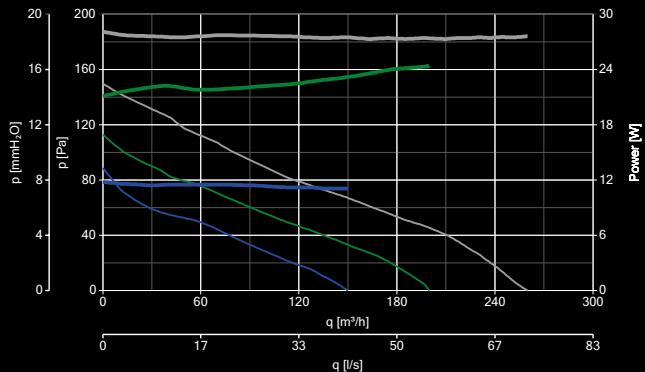


LINEO 125 QUIET - LINEO 125 T QUIET

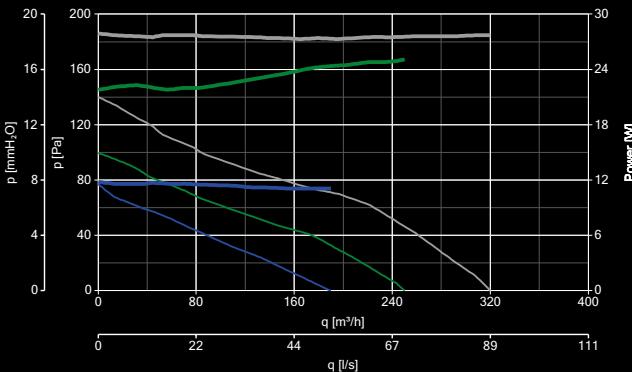


LINEO 150 QUIET - LINEO 150 T QUIET

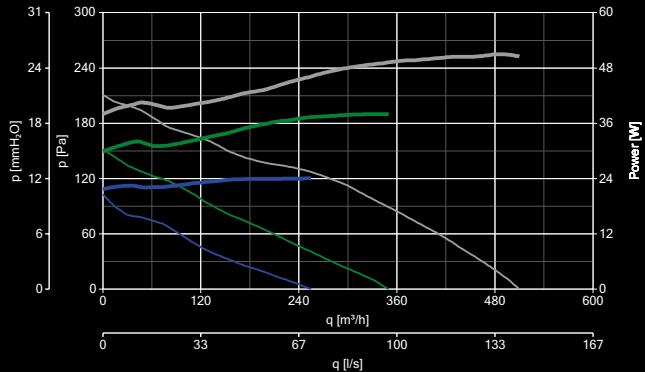


LINEO 160 QUIET - LINEO 160 T QUIET

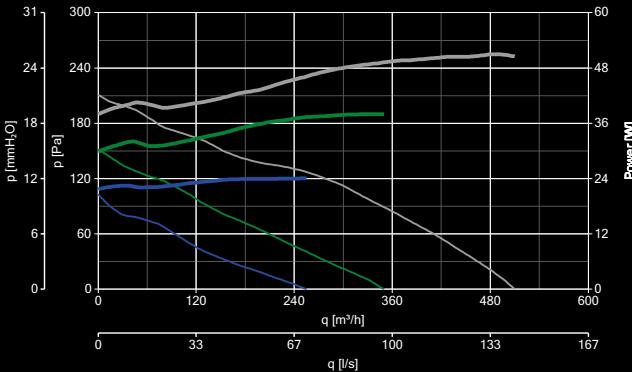


LINEO 200 QUIET - LINEO 200 T QUIET

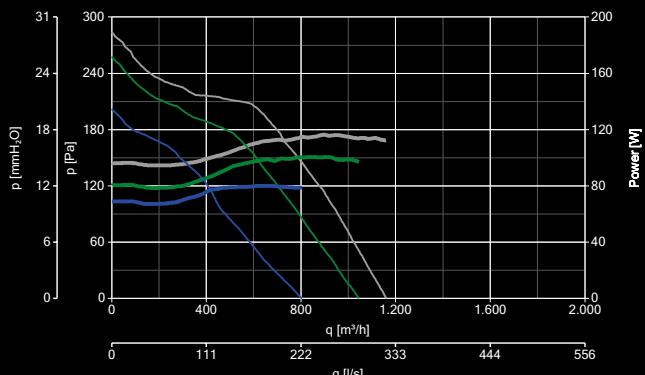

LINEO 250 QUIET

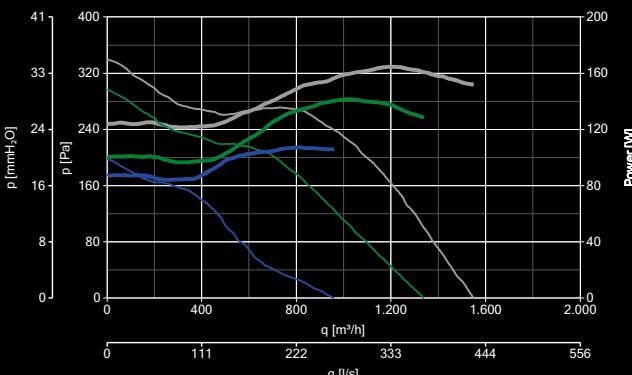

LINEO 315 QUIET

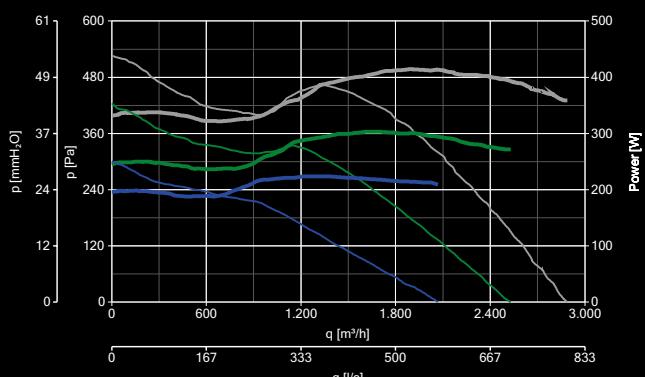

CONSUMPTION	PERFORMANCE
10V	10V
6V	6V
4V	4V

NEW

LINEO QUIET RANGE

In-line mixed flow fans equipped with AC motors

**CONTROLLERS - LINEO QUIET**

MODELS	DESCRIPTION	CODE	PRODUCT
	C 0.5 - 5 SPEED CONTROLLER	12987	17160 - 17161 - 17162 - 17163 - 17164 17165 - 17166
	C 1.5 - ELECTRONIC SPEED CONTROLLER 1.5 A	12966	17160 - 17161 - 17162 - 17163 - 17164 17165 - 17166
	C 2.5 - ELECTRONIC SPEED CONTROLLER 2.5 A	12967	17165 - 17166
	KIT SCB5 - CONVERTS SCR5 TO A BUILT-IN VERSION	22483	12987 - 12966 - 12967
	KIT SCB - BUILT-IN CONTROLLER ADAPTOR	22481	12987 - 12966 - 12967
	TRIO - POTENTIOMETER	12891	17160 - 17161 - 17162 - 171763 - 17164 17165 - 17166 - 17190 - 17191 17192 17193 - 17194
	C TEMP - THERMO SWITCH	12992	ALL PRODUCTS
	C SMOKE - AIR QUALITY SENSOR	12993	ALL PRODUCTS
	C HCS - HUMIDISTAT	12994	ALL PRODUCTS
	C PIR - PASSIVE INFRARED SENSOR	12998	ALL PRODUCTS
	C TIMER - TIMER	12999	ALL PRODUCTS





LINEO RANGE

In-line mixed flow fans

The LINEO range products are fitted with 3-speed induction motors.

THE BEST COMPROMISE BETWEEN
PERFORMANCE, POWER CONSUMPTION
AND NOISE EMISSIONS.



OPTIMUM EASE AND FLEXIBILITY OF INSTALLATION

STRENGTHS

- Complete range, 26 models with a nominal diameter between 100 mm and 315 mm, 18 equipped with AC motors and 8 equipped with brushless EC motors.
- With or without timer and silenced.
- Flexibility and ease of installation ideal for your specific performance-related plant requirements, consumption needs and operating costs.

LINEO 315

LINEO 250

LINEO 200



LINEO 160

LINEO 150

LINEO 125

LINEO 100



easy

MAINTENANCE

INLET NOZZLE


Dimensioned to sustain
the product in the wall and
ceiling installation



ELECTRIC BOX

Produced in a material
granting electrical and
fire resistance


DIVERGENT ELEMENT
It helps the impeller to increase
the performance

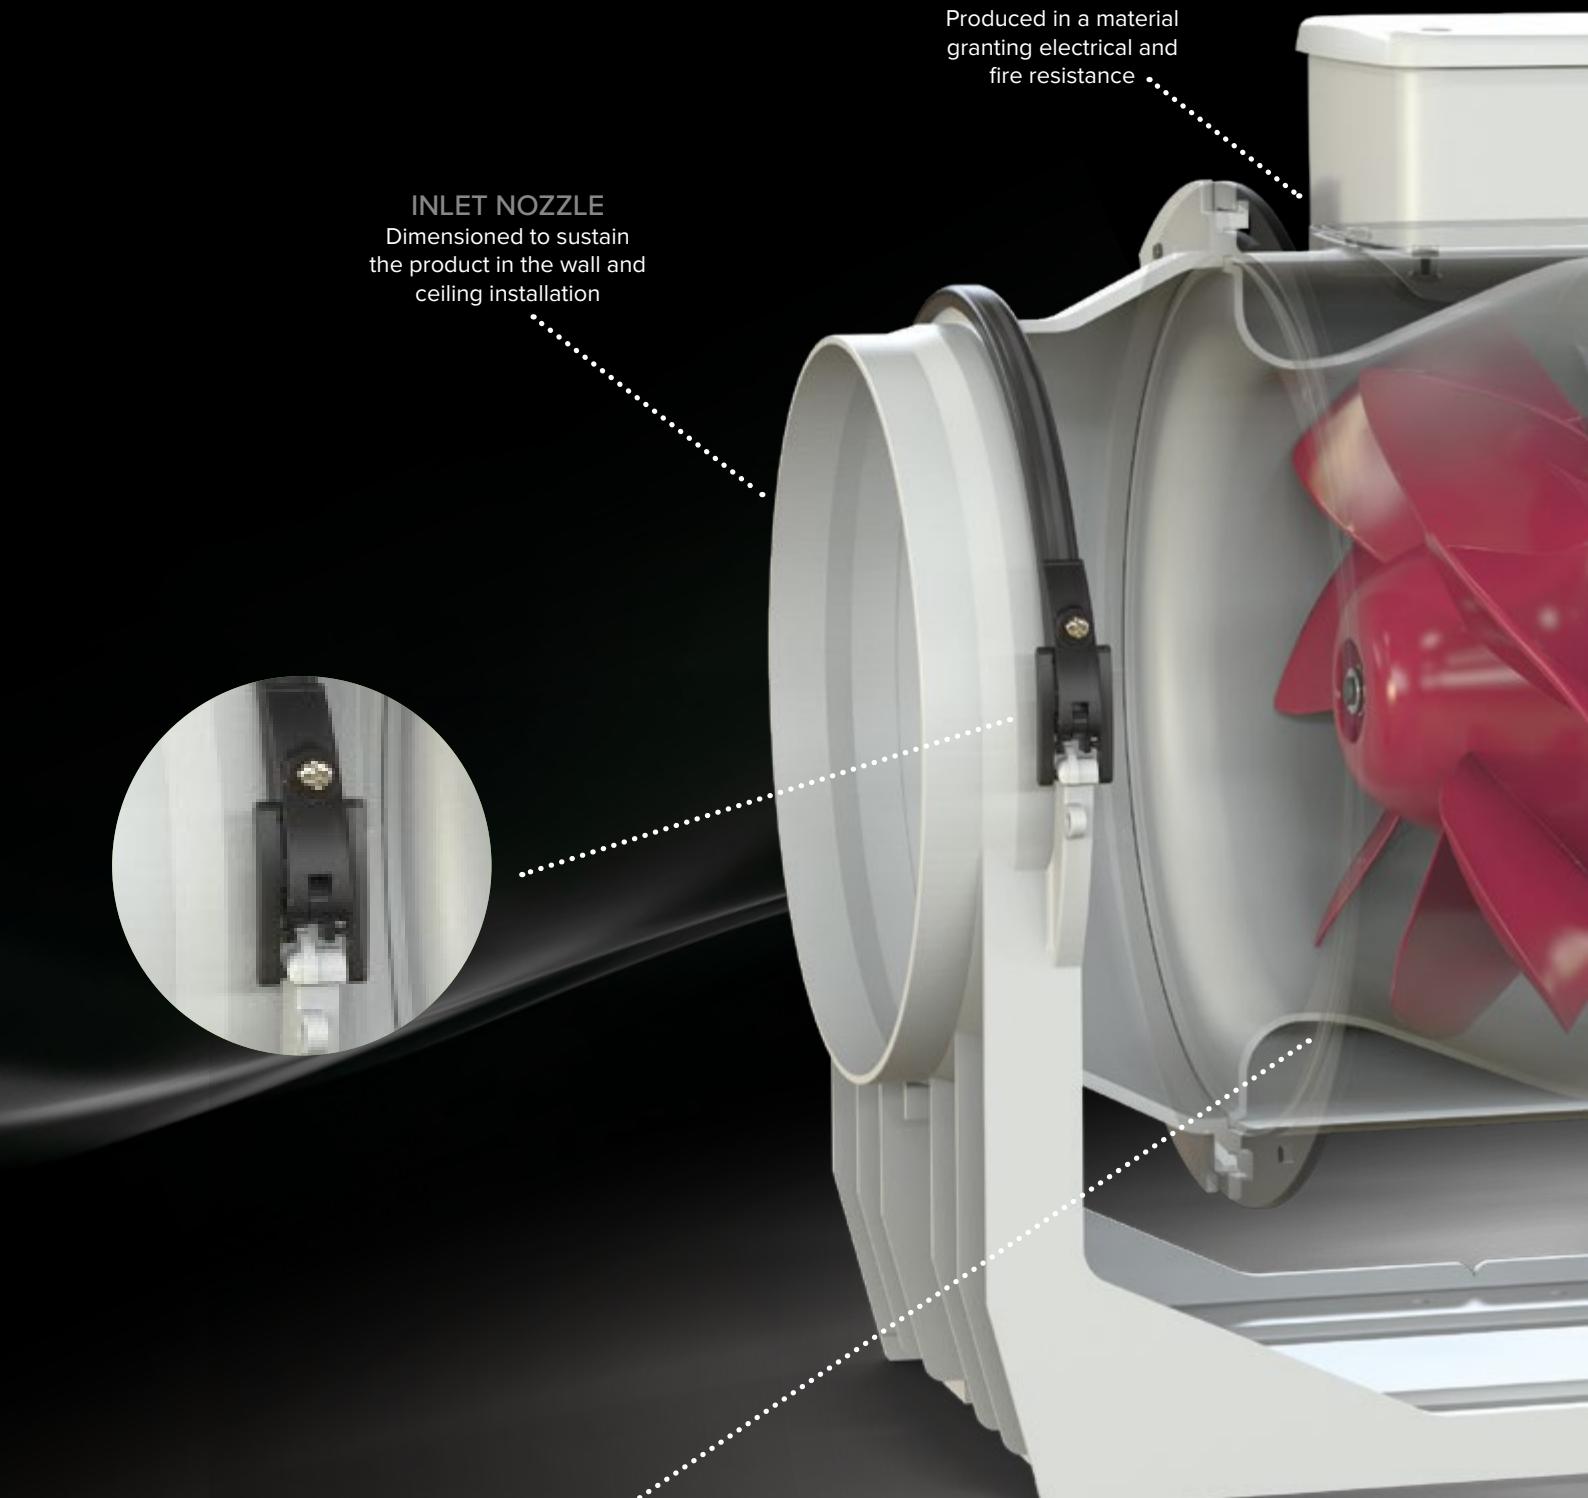

NEW

LINEO RANGE

In-line mixed flow fans

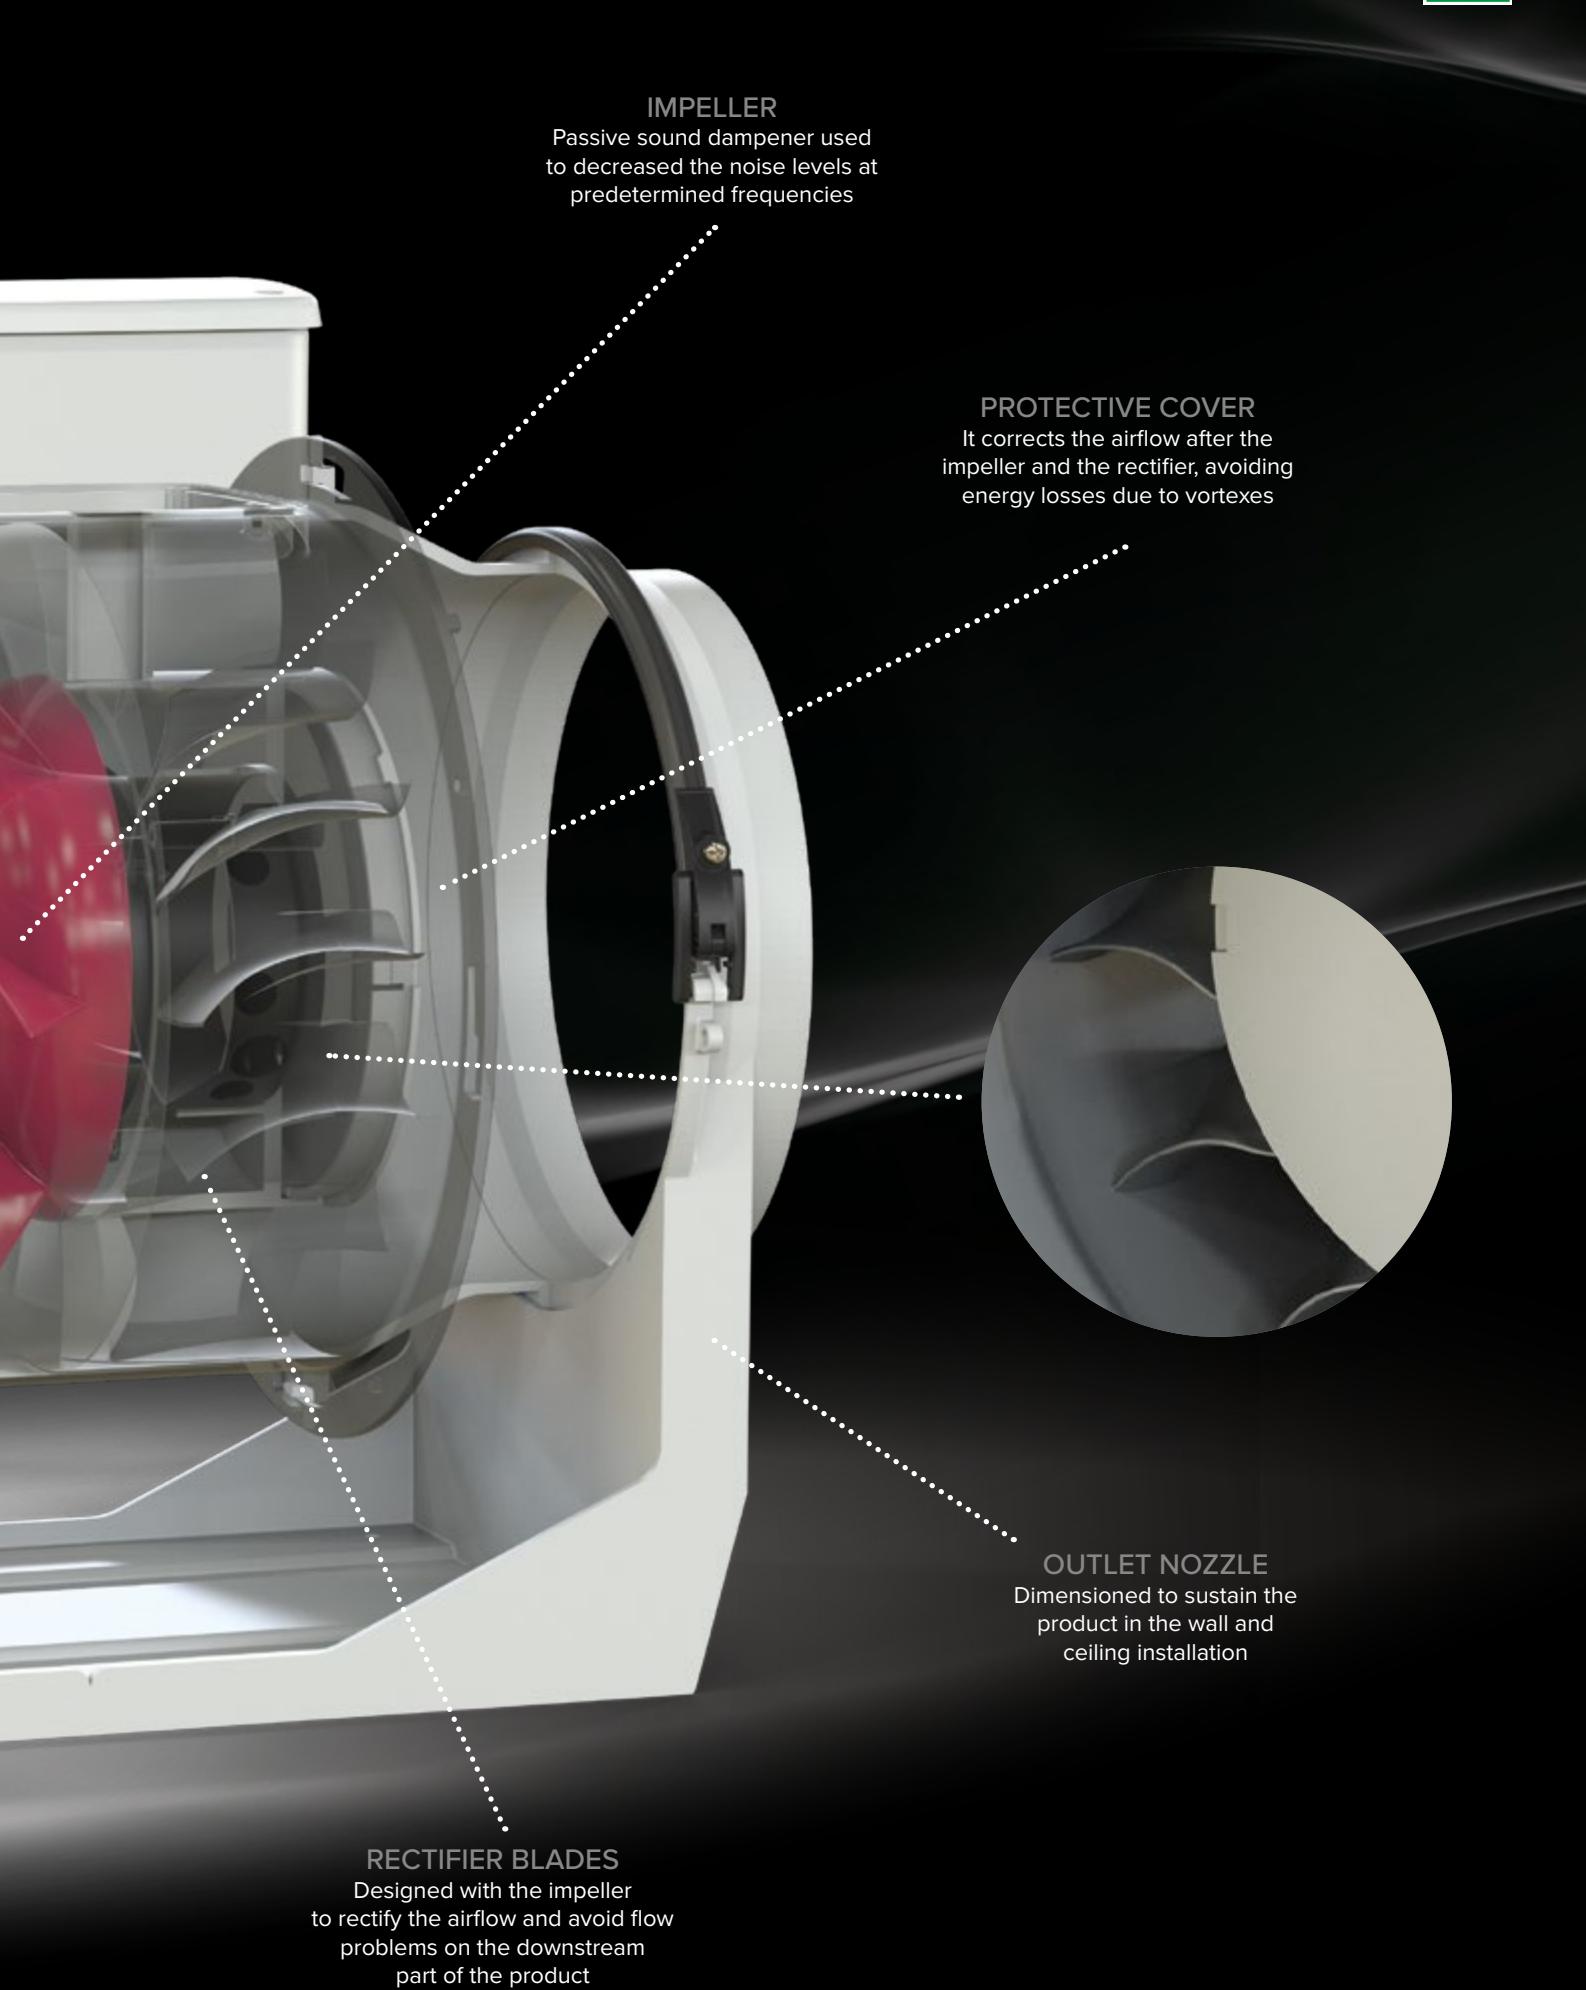

IMPELLER

Passive sound dampener used to decreased the noise levels at predetermined frequencies

PROTECTIVE COVER

It corrects the airflow after the impeller and the rectifier, avoiding energy losses due to vortexes

OUTLET NOZZLE

Dimensioned to sustain the product in the wall and ceiling installation

RECTIFIER BLADES

Designed with the impeller to rectify the airflow and avoid flow problems on the downstream part of the product



LINEO RANGE NEW

In-line mixed flow fans equipped with AC motors

TECHNICAL AND PERFORMANCE DATA - LINEO

Models	Code	V ~ 50/60Hz	W (50Hz) min/max	W (60Hz) min/max	A min/max	RPM min/max	Max Airflow m³/h min/max	I/s min/max	Max Pressure mmH ₂ O min/max	Pa min/max	Sound Pressure Lp dB (A)*	Max °C (50Hz)	Max °C (60Hz)	KG	
LINEO 100	17144		220-240	20	22	0.09	1860	180	50	13	127.5	30.7	60	50	1.8
LINEO 100 T	17185			23	23	0.11	2450	255	70.8	16.5	161.9	39.4			
LINEO 100 Q	17143														
LINEO 100 Q T	17184		220-240	12	15	0.09	1860	155	43.1	6.5	63.8	29.4	60	50	1.8
LINEO 125	17145			15	20	0.11	2450	200	55.6	7.5	73.6	37.9			
LINEO 125 T	17186														
LINEO 150	17146		220-240	25	33	0.11	1570	250	69.4	13	127.5	33.9	60	50	1.8
LINEO 150 T	17187			33	36	0.15	2140	365	101.4	17	166.8	43			
LINEO 160	17147														
LINEO 160 T	17188		220-240	40	58	0.18	1580	385	106.9	21	206	41.4	60	50	2.4
LINEO 200 Q	17148			58	58	0.26	2100	550	152.8	27	264.9	50.5			
LINEO 200 Q T	17189														
LINEO 250 Q	17149		220-240	45	45	0.22	1780	700	194.4	13	127.5	39.6	60	50	4.3
LINEO 250 Q T	17197			75	90	0.37	2740	950	263.9	29	284.5	49.0			
LINEO 250 Q T	17197														

* Calculated in free field conditions at 3 m distance

Models	Code	V ~ 50	W min/med/max	A min/med/ max	RPM min/med/max	Max Airflow m³/h min/med/max	I/s min/med/max	Max Pressure mmH ₂ O min/med/max	Pa min/med/max	Max °C	KG
LINEO 200	17180		80	0.34	1925	815	226.4	21.5	210.9		
LINEO 200 T	17177	220 - 240	95	0.42	2450	1025	284.7	27.3	267.7	50	4,9
LINEO 250	17181	220 - 240	90	0.41	1500	725	201	13.9	136.5		
LINEO 250	17181		120	0.54	2240	1145	318	29	284.4	50	5,3
LINEO 250	17181		145	0.63	2730	1440	400	37.2	364.8		
LINEO 315	17182	220 - 240	190	1.14	1770	1590	442	27.1	265.8		
LINEO 315	17182		260	1.57	2300	2115	588	42.2	413.9	50	9,5
LINEO 315	17182		360	1.60	2690	2590	719	55.4	543.3		

SUONDS LEVELS - LINEO 200 - 250 - 315

Calculated in free field conditions at 3 m distance

Models	Code	INTAKE			SUPPLY			IRRADIATED		
		min	med.	max	min	med.	max	min	med.	max
LINEO 200	17180									
LINEO 200	17180	80	86.4	89.5	78.6	74.9	88.2	57.4	63.7	67.5
LINEO 200 T	17177									
LINEO 200 T	17177	80	86.4	89.5	78.6	74.9	88.2	57.4	63.7	67.5
LINEO 250	17181									
LINEO 250	17181	73.6	83.3	88.2	72.2	81.7	86.4	52.4	60	64
LINEO 315	17182									
LINEO 315	17182	82.6	88.7	92	82	88.2	91.8	60.1	66.3	69.5

SOUND PRESSURE LP dB(A)

Models	Code	INTAKE			SUPPLY			IRRADIATED		
		min	med.	max	min	med.	max	min	med.	max
LINEO 200	17180									
LINEO 200	17180	62.5	68.8	72	61.1	67.4	70.7	36.9	43.1	46.9
LINEO 200 T	17177									
LINEO 200 T	17177	62.5	68.8	72	61.1	67.4	70.7	36.9	43.1	46.9
LINEO 250	17181									
LINEO 250	17181	56.1	65.8	70.7	54.6	64.2	68.8	31.9	39.5	43.5
LINEO 315	17182									
LINEO 315	17182	65	71.1	74.5	64.5	70.6	74.2	39.6	45.8	49

NEW

LINEO RANGE

In-line mixed flow fans equipped with AC motors




DIMENSIONS - LINEO

Models	Code	A	B	C	Ø D	E	F	G	H	L	Ø M	N
LINEO 100	17144	188.5	211	303	96	101.5	189	90	60	80	5.5	-
LINEO 100 T	17185	188.5	211	303	96	101.5	189	90	60	80	5.5	-
LINEO 100 Q	17143	156	174	231	96	82	152	95	51.5	47.5	4.5	-
LINEO 100 Q T	17184	156	174	231	96	82	152	95	51.5	47.5	5.5	-
LINEO 125	17145	188.5	211	258	122	101.5	189	90	60	80	5.5	-
LINEO 125 T	17186	188.5	211	258	122	101.5	189	90	60	80	5.5	-
LINEO 150	17146	214.5	234	294	146	112.5	212	110	60	80	5.5	-
LINEO 150 T	17187	214.5	234	294	146	112.5	212	110	60	80	5.5	-
LINEO 160	17147	214.5	234	272.5	156	112.5	212	110	60	80	5.5	-
LINEO 160 T	17147	214.5	234	272.5	156	112.5	212	110	60	80	5.5	-
LINEO 200	17180	270	373	396	194.5	195	330	190	120	155	5.5	-
LINEO 200 T	17177	270	373	396	194.5	195	330	190	120	155	5.5	280
LINEO 200 Q	17148	234.5	266	300	196	125.5	235	140	94	100	5.5	-
LINEO 200 Q T	17189	234.5	266	300	196	125.5	235	140	94	100	5.5	-
LINEO 250	17181	300	378	322	243	190	329	200	70	170	5.5	174.5
LINEO 250 Q	17149	300	322	385	247	152.5	292	176.5	140	145	5.5	-
LINEO 250 Q T	17189	300	322	385	247	152.5	292	176.5	140	145	5.5	174.5
LINEO 315	17182	373	446	420	307	224	398	309	110	255	8.5	259.5


VERSION A

LINEO 100 - LINEO 100 T - LINEO 125 - LINEO 125 T - LINEO 150 - LINEO 150 T
 LINEO 160 - LINEO 160 T - LINEO 200 Q - LINEO 200 Q T - LINEO 250 Q - LINEO 250 Q T

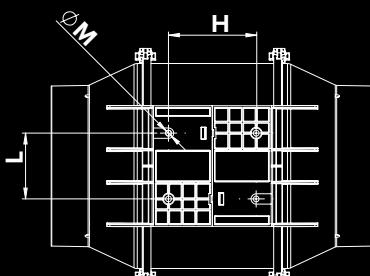




VERSION B

LINEO 100 Q
 LINEO Q T

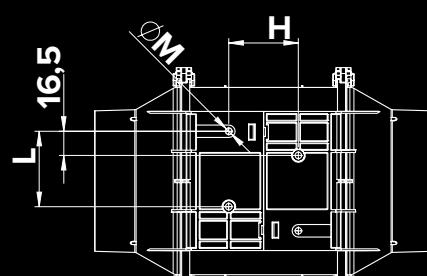

VERSION C

LINEO 200 - LINEO 200 T - LINEO 250 - LINEO 315

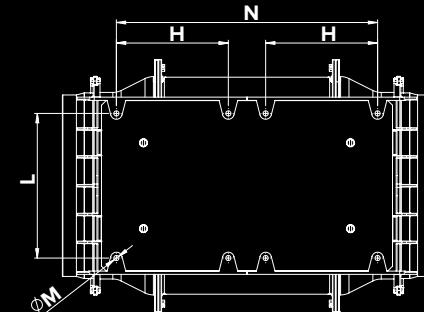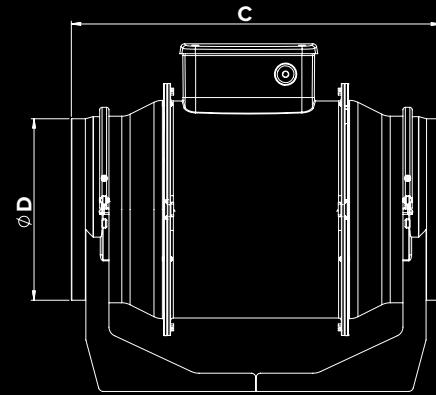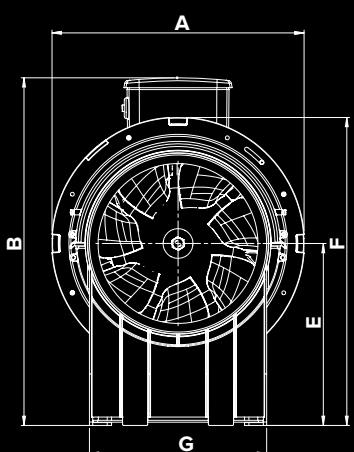









LINEO RANGE

NEW

In-line mixed flow fans equipped with AC motors

PERFORMANCE AND ABSORPTION CURVES - LINEO

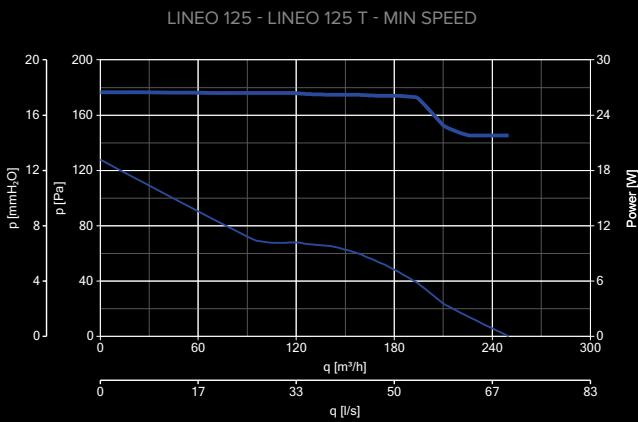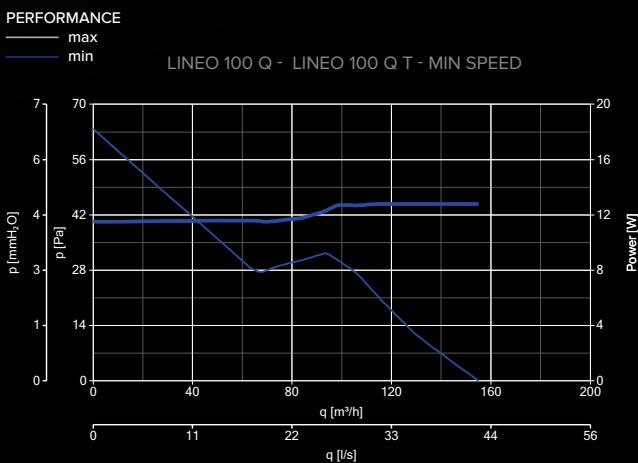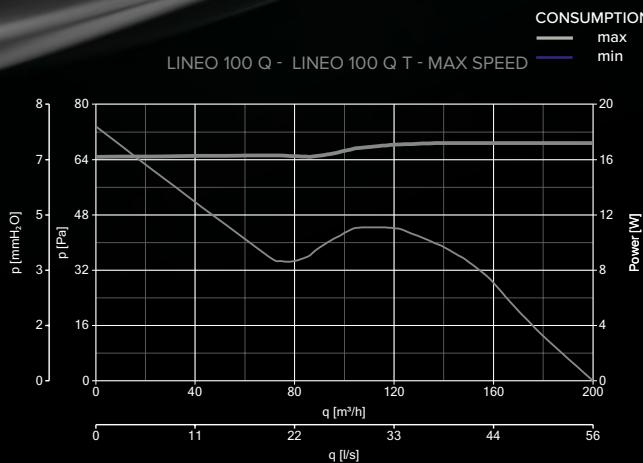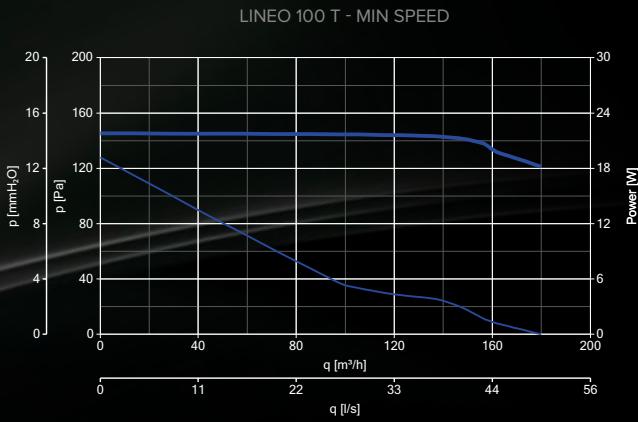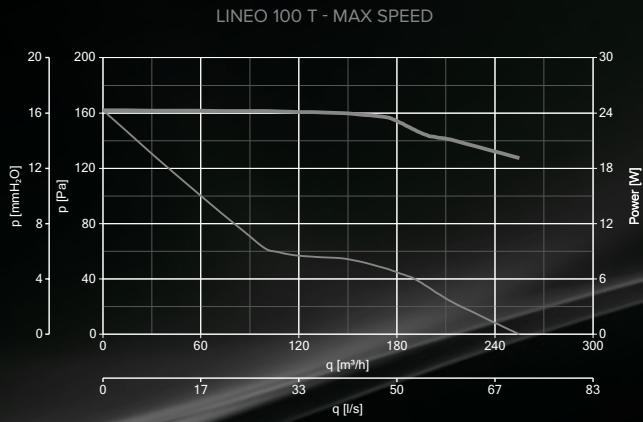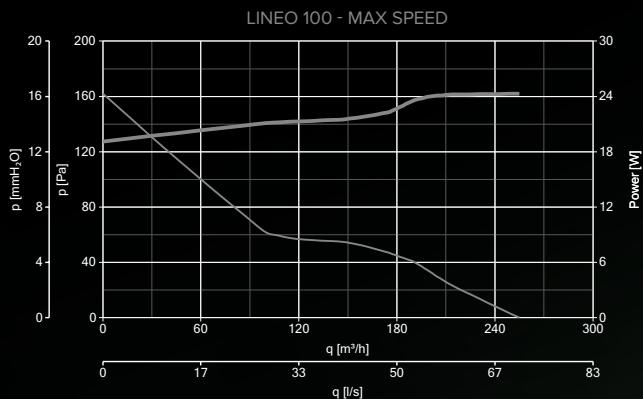

NEW


LINEO RANGE

In-line mixed flow fans equipped with AC motors




PERFORMANCE AND ABSORPTION CURVES - LINEO


LINEO 150 - LINEO 150 T - MAX SPEED

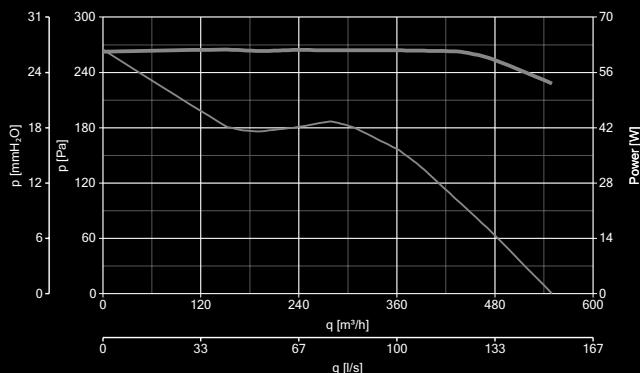


LINEO 150 - LINEO 150 T - MIN SPEED

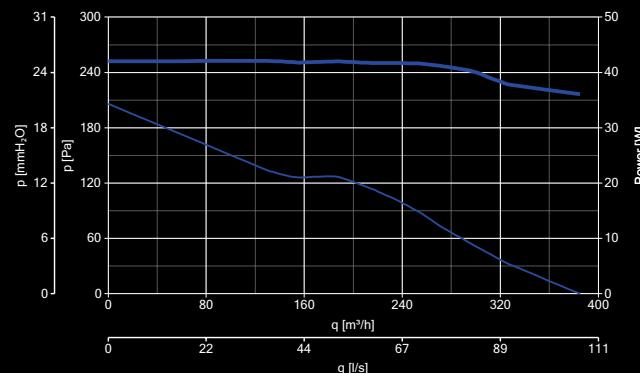


LINEO 160 - LINEO 160 T - MAX SPEED

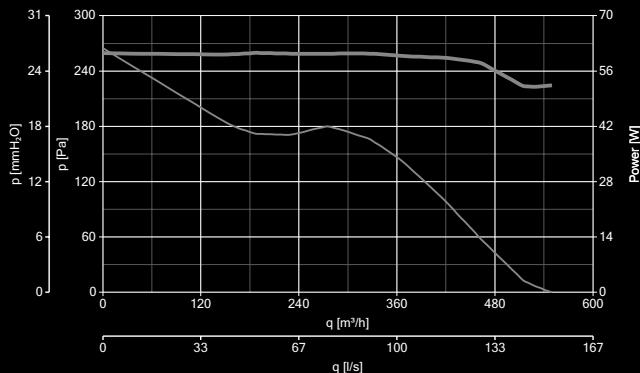


LINEO 160 - LINEO 160 T - MIN SPEED

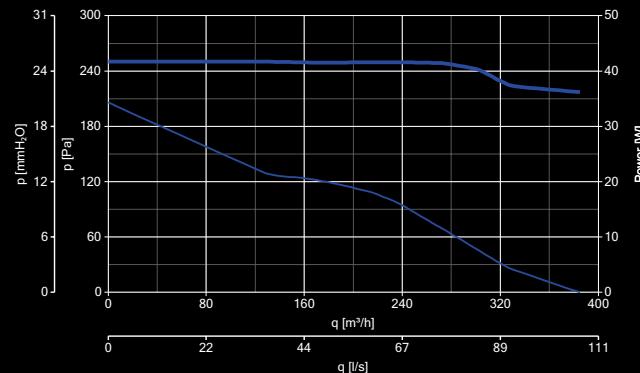


LINEO 200 Q - LINEO 200 Q T - MAX SPEED

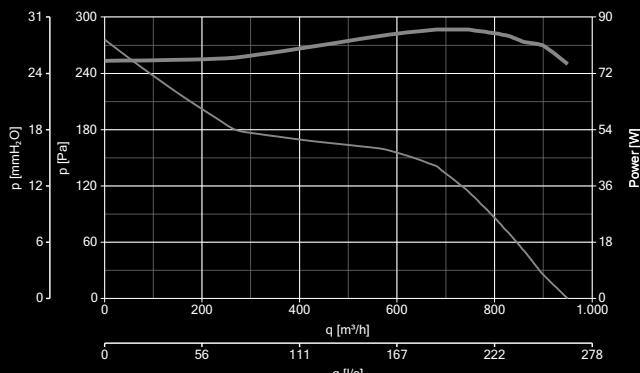


LINEO 200 Q - LINEO 200 Q T MIN SPEED

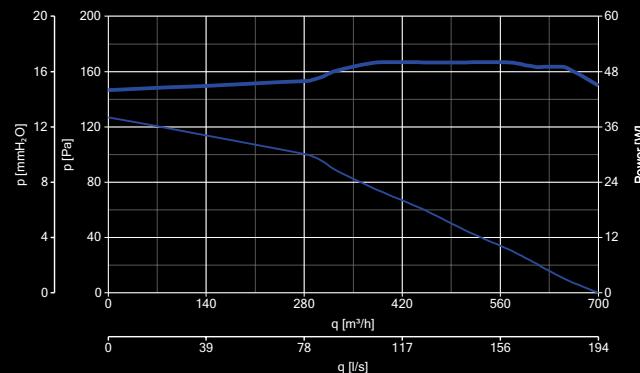

LINEO 250 Q - LINEO 250 Q T - MAX SPEED

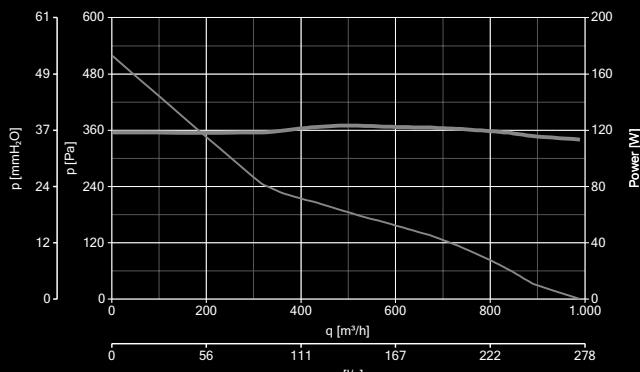

LINEO 250 Q - LINEO 250 Q T - MAX SPEED

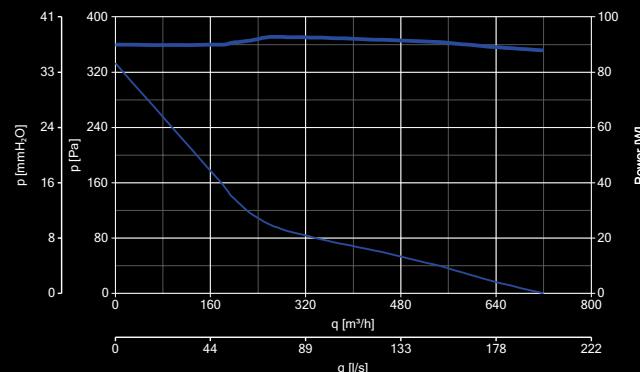






LINEO RANGE

NEW

In-line mixed flow fans equipped with AC motors

PERFORMANCE AND ABSORPTION CURVES - LINEO

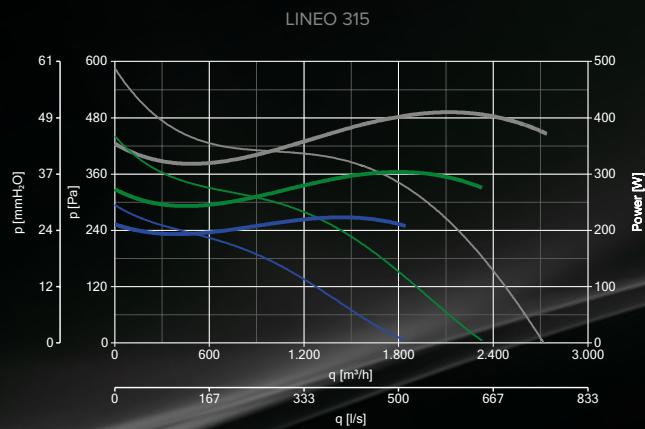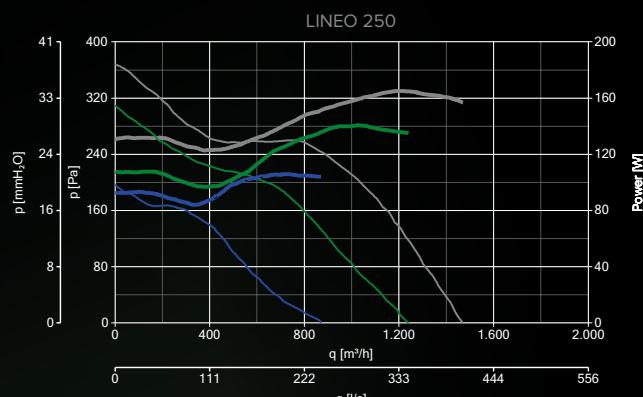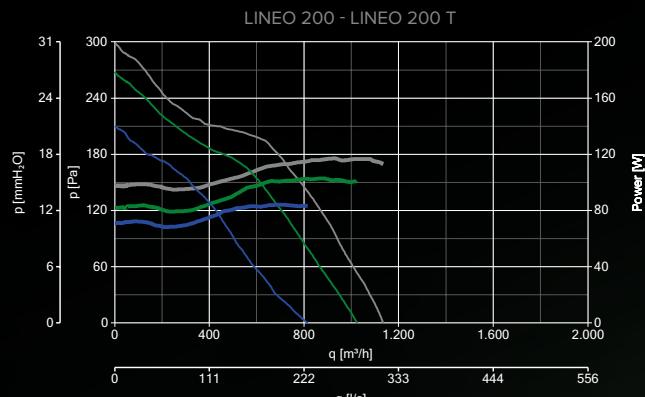


CONSUMPTION PERFORMANCE
MAX MAX
MID MID
MIN MIN

NEW

LINEO RANGE

In-line mixed flow fans equipped with AC motors

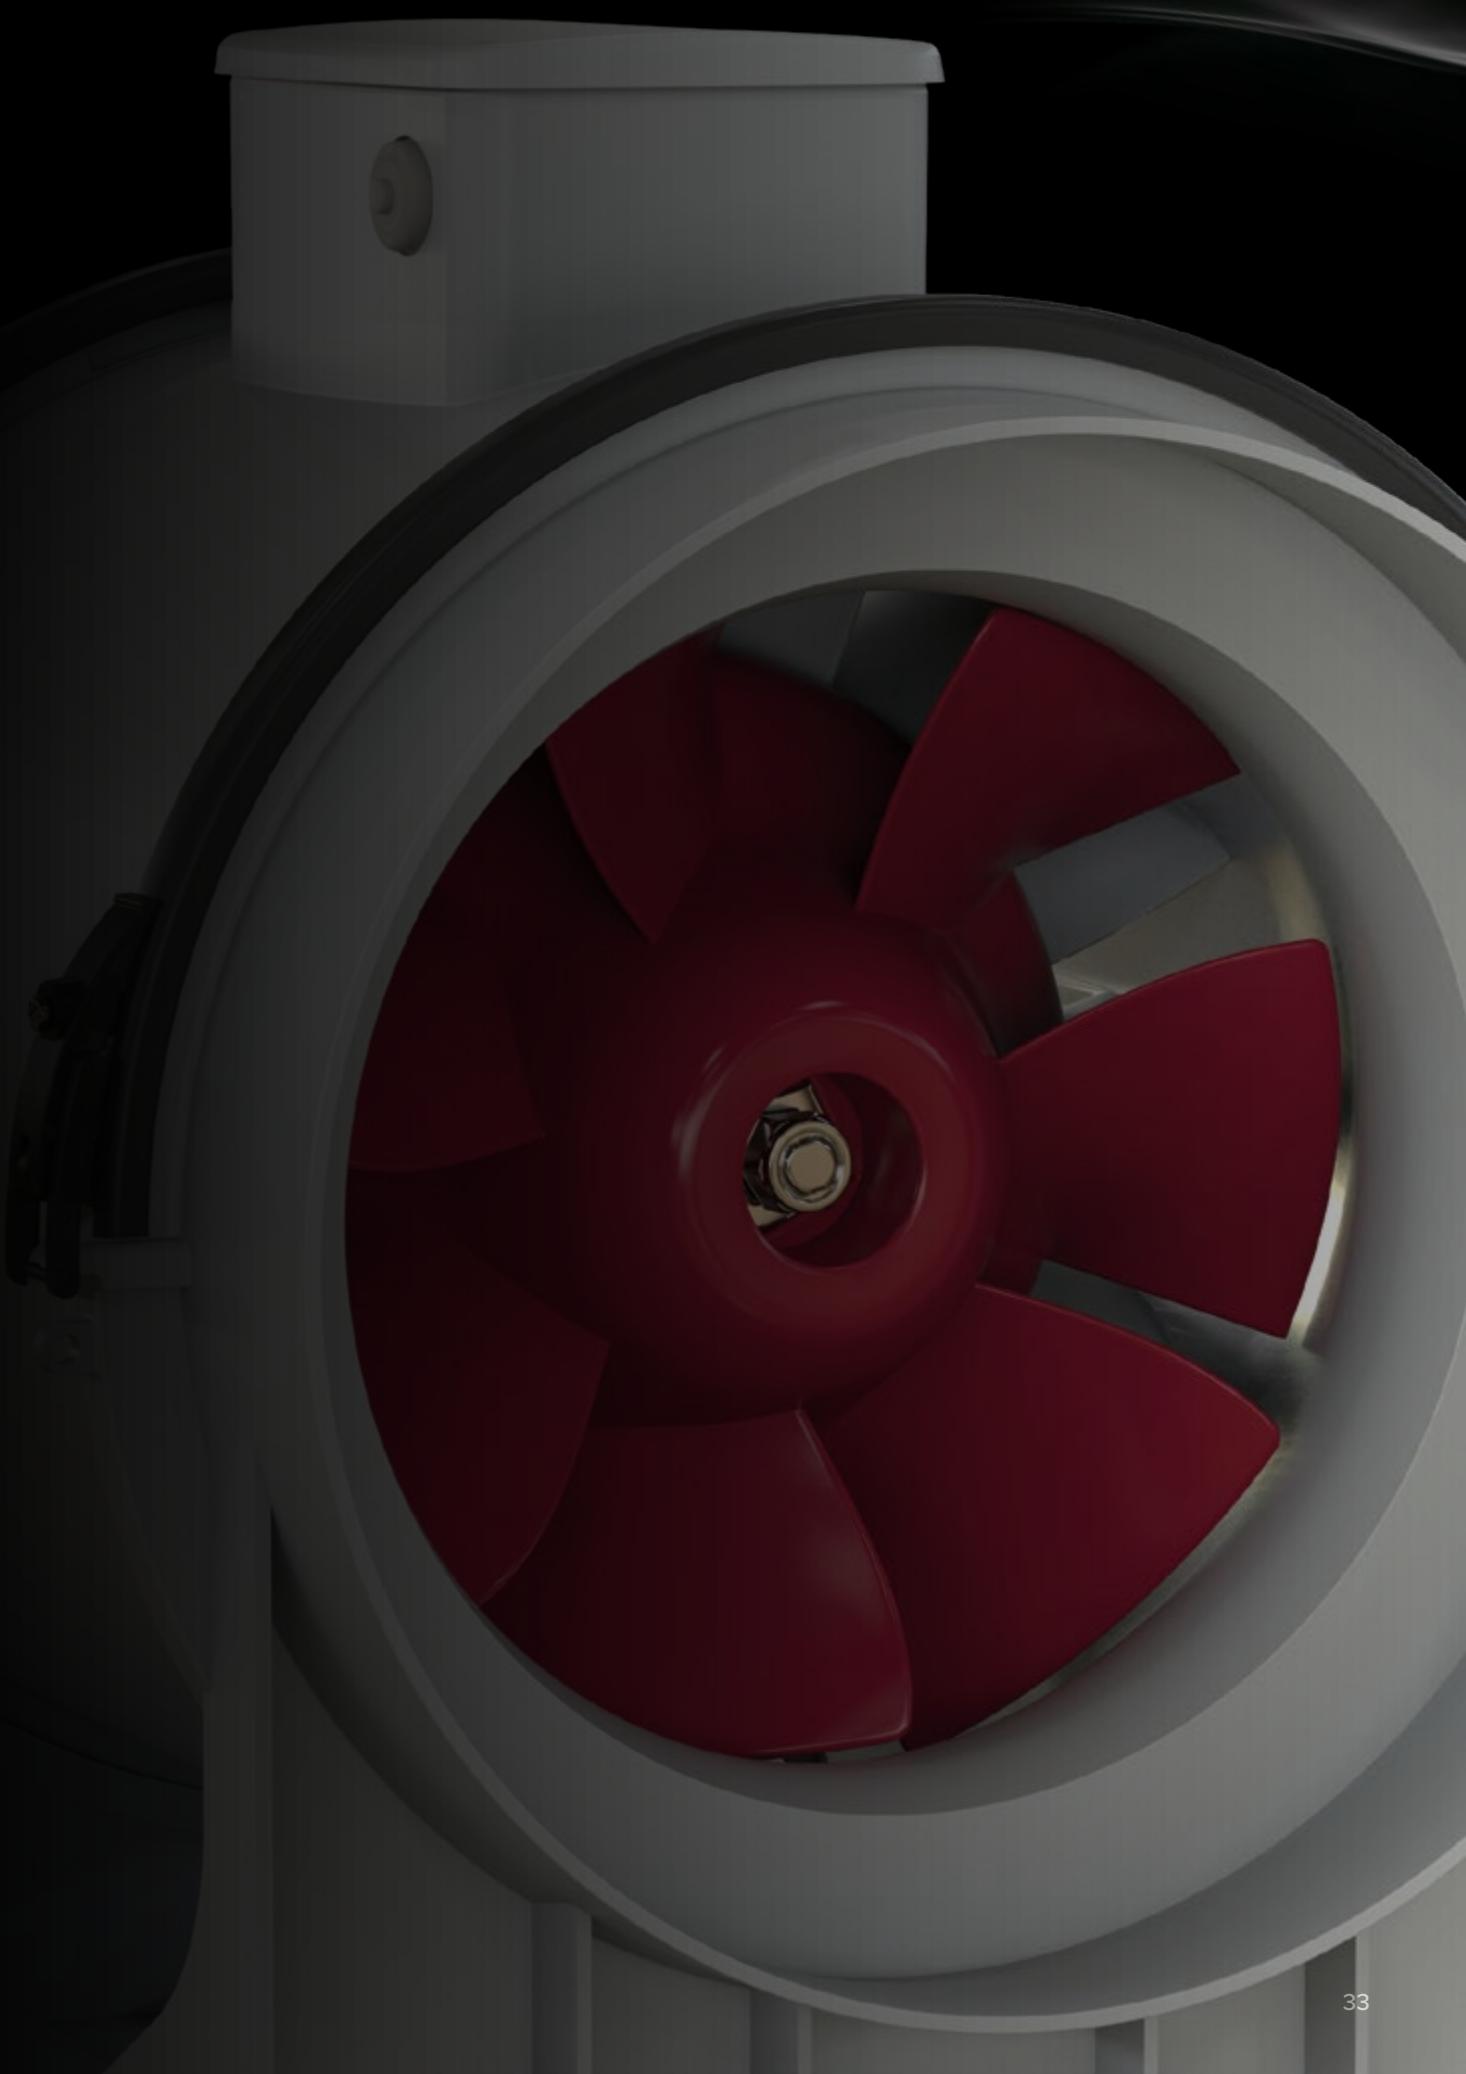



LINEO ES RANGE

NEW

In-line mixed flow fans equipped with EC Brushless motors

TECHNICAL AND PERFORMANCE DATA - LINEO ES

Models	Code	V	W	A	RPM	Max Airflow		Max Pressure		Max °C	KG
		~ 50/60HZ	4/6/8/10V	4/6/8/10V	4/6/8/10V	m³/h 4/6/8/10V	l/s 4/6/8/10V	mmH ₂ O 4/6/8/10V	Pa 4/6/8/10V		
LINEO 100 ES	17159	50HZ 220 - 240	6.5	0.07	1070	140	38.9	3.7	36.3	60	2.3
			8.7	0.09	1345	175	48.6	6.1	59.8		
			16	0.15	1900	250	250	11.4	111.8		
		20	0.20	2220	305	84.7	26.4	258.9			
LINEO 100 Q ES	17158	220 - 240	5	0.05	1090	70	19.4	1.2	11.8	60	1.8
			6.2	0.06	1450	105	29.2	2.3	22.6		
			10.5	0.10	2300	165	45.8	5.2	51		
		20	0.20	3435	260	72.2	15.7	154			
LINEO 125 ES	17178	220 - 240	7	0.07	1090	170	47.2	3.8	37.3	60	2.2
			10	0.10	1395	220	61.1	6.5	63.7		
			18	0.17	1940	315	87.5	11.8	115.7		
		25	0.25	2270	370	102.8	30.2	296.2			
LINEO 150 ES	17179	220 - 240	11	0.10	2125	500	138.9	8.5	83.4	60	2.6
			17	0.16	1595	370	102.8	13.8	135.3		
			34	0.30	1260	290	80.6	22.7	222.6		
		55	0.50	2480	590	163.9	44.2	433.5			
LINEO 160 ES	17183	220 - 2440	12	0.11	1305	300	83.3	9	9	60	2.7
			19	0.17	1645	385	106.9	14.8	145.1		
			37	0.33	2165	510	141.7	23.5	230.5		
		60	0.55	2625	630	175	47.2	462.9			
LINEO 200 ES	17167	220 - 240	15.8	0.19	1380	560	155.6	9.2	90.2	50	4.6
			25.7	0.28	1700	700	194.4	14.4	141.2		
			52.8	0.53	2220	920	255.6	24	235.4		
		90	0.80	2680	1100	305.6	34.9	342.4			
LINEO 250 ES	17168	220 - 240	20	0.20	2270	750	208.3	10.4	102	50	5
			35	0.30	1695	995	276.4	16.3	159.9		
			80	0.70	1370	1245	345.8	27.8	272.6		
		125	1.00	2680	1500	416.7	40.5	397.2			
LINEO 315 ES	17169	220 - 240	45	0.38	1310	1385	384.7	14.2	139.3	50	9.2
			75	0.64	1580	1720	477.8	21.3	208.9		
			165	1.35	2130	2300	638.9	37.7	369.7		
		220	1.75	2360	2560	711.1	42.3	414.8			

SOUNDS LEVELS - LINEO ES

Calculated in free field conditions at 3 m distance

SOUND LEVEL Lw dB (A)

Models	Code	INTAKE				SUPPLY				IRRADIATED			
		4V	6V	8V	10V	4V	6V	8V	10V	4V	6V	8V	10V
LINEO 100 ES	17159	63.3	69.4	78.2	82.6	62.1	68.4	77.5	82	35.5	39.5	47.8	52.3
LINEO 100 Q ES	17158	57.8	64.9	75.1	85.7	54.9	64.9	73.5	85.7	35.1	37.4	47.5	56.6
LINEO 125 ES	17178	64.1	68.2	76.7	81.4	63.6	68.6	77.5	81.5	36.8	40.5	48.8	52.2
LINEO 150 ES	17179	67.9	74.6	82.1	87.9	69.6	75.2	82.1	86.4	41.5	47.8	56.1	62.5
LINEO 160 ES	17183	68.4	76.4	83.1	87.5	69.1	76	82.8	86.9	42.4	49.4	57	62.3
LINEO 200 ES	17167	78.5	83.9	86.9	89.4	77.5	82.9	85.4	88.4	55.6	60.4	62.8	65
LINEO 250 ES	17168	74.2	79.1	85.1	88.9	74.4	79.2	84.9	88.5	49.5	54.3	61.4	64
LINEO 315 ES	17169	83.1	88	90.7	92.8	80.8	88.2	88.8	90	63	64.6	65.3	68.1

SOUND PRESSURE LP dB(A)

Models	Code	INTAKE				SUPPLY				IRRADIATED			
		4V	6V	8V	10V	4V	6V	8V	10V	4V	6V	8V	10V
LINEO 100 ES	17159	45.8	51.9	60.7	65.1	44.6	50.9	59.9	64.4	15	18.9	27.2	31.8
LINEO 100 Q ES	17158	40.2	47.3	57.6	68.2	37.3	47.4	56	68.1	14.6	16.9	27	36.1
LINEO 125 ES	17178	46.6	50.6	59.1	63.9	46	51.1	60	64	16.2	20	28.3	31.6
LINEO 150 ES	17179	50.4	57.1	64.6	70.3	52.1	57.7	64.5	68.9	21	27.2	35.5	41.9
LINEO 160 ES	17183	50.9	58.9	65.6	70	51.5	58.5	65.6	69.3	21.9	28.9	36.5	41.8
LINEO 200 ES	17167	60.9	66.4	69.4	71.9	60	65.3	67.9	70.8	35.1	39.9	42.3	44.5
LINEO 250 ES	17168	56.7	61.5	67.6	71.3	56.9	61.6	67.3	71	29	33.7	40.9	43.4
LINEO 315 ES	17169	65.6	70.4	73.2	75.3	63.3	70.6	71.2	72.4	42.5	44	44.8	47.5


NEW

LINEO ES RANGE


In-line mixed flow fans equipped with EC Brushless motors

**DIMENSIONS - LINEO ES**




Models	Code	A	B	C	$\varnothing D$	E	F	G	H	L	$\varnothing M$	N
LINEO 100 ES	17159	188.5	240	303	96	101.5	189	90	60	80	5.5	-
LINEO 100 Q ES	17158	156	205	231	96	82	152	95	51.5	47.5	4.5	-
LINEO 125 ES	17178	188.5	240	258	122	101.5	189	90	60	80	5.5	-
LINEO 150 ES	17179	214.5	265	294	146	112.5	212	110	60	80	5.5	-
LINEO 160 ES	17183	214.5	265	272.5	156	112.5	212	110	60	80	5.5	-
LINEO 200 ES	17167	270	372.5	396	194.5	195	330	190	120	155	5.5	280
LINEO 250 ES	17168	300	377.5	322	243	190	329	200	70	170	6.5	174.5
LINEO 315 ES	17169	373	506	420	307	224	398	309	110	255	8.5	259.5

VERSION ALINEO 100 ES - LINEO 125 ES
LINEO 150 ES - LINEO 160 ES**VERSION B**

LINEO 100 Q ES

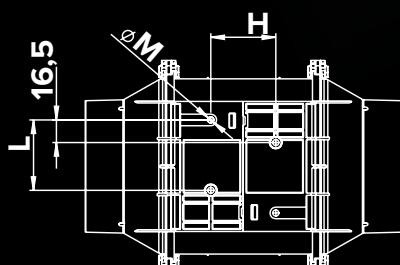**VERSION C**

LINEO 200 ES - LINEO 250 ES - LINEO 315 ES

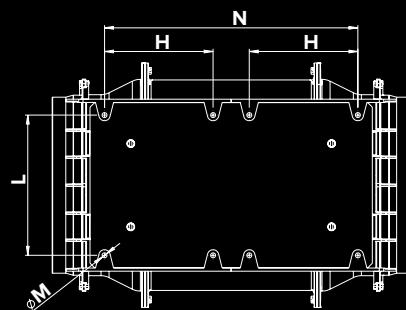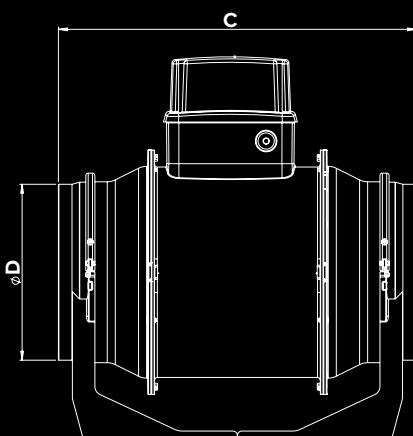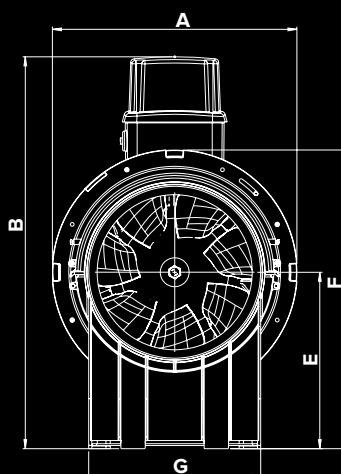




LINEO ES RANGE

NEW


In-line mixed flow fans equipped with EC Brushless motors

PERFORMANCE AND ABSORPTION CURVES - LINEO ES


LINEO 100 ES

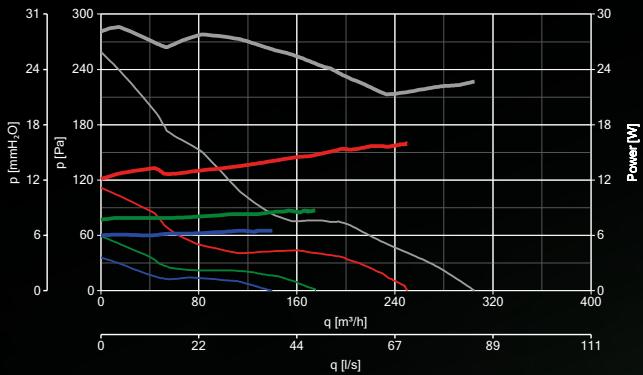


LINEO 100 Q ES

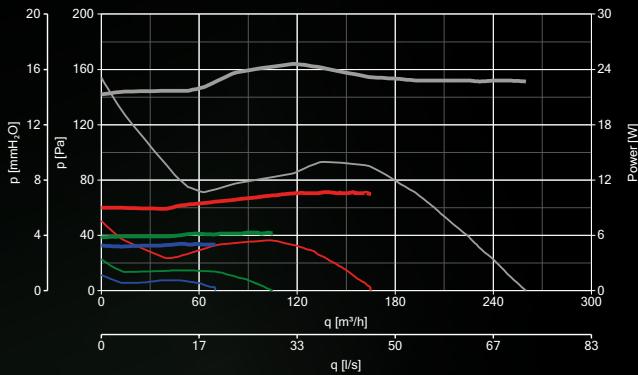


LINEO 125 ES

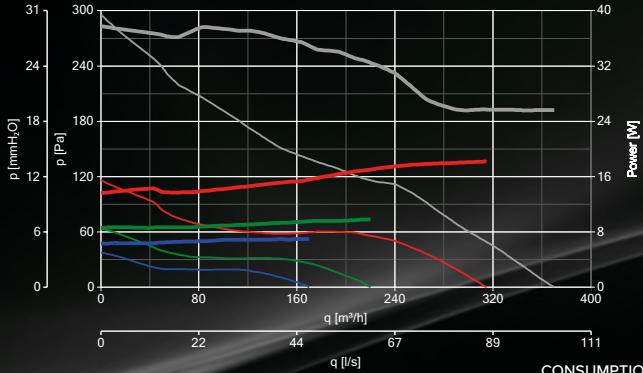


LINEO 150 ES

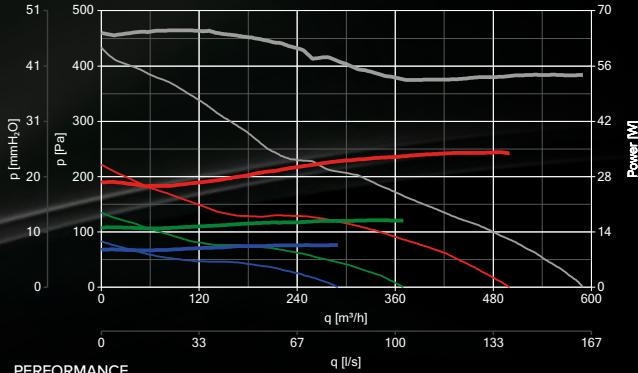


LINEO 160 ES

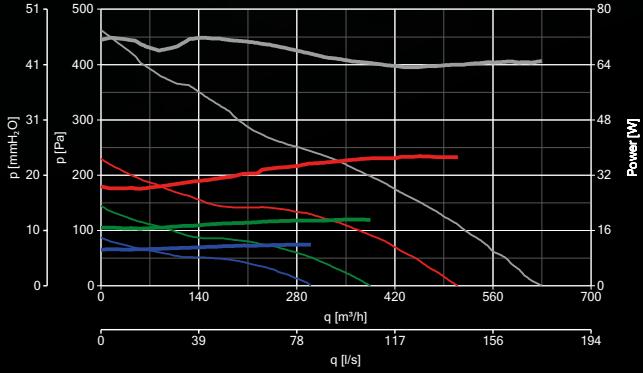


LINEO 200 ES

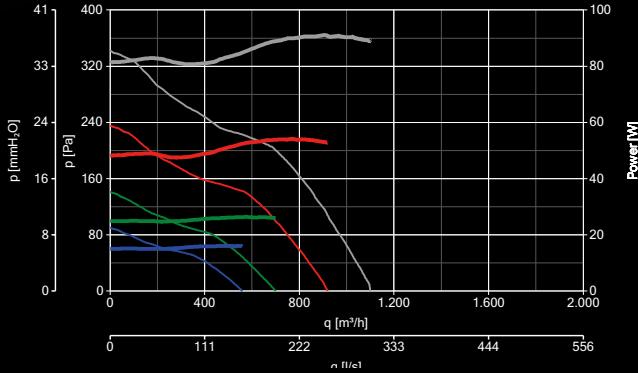

LINEO 250 ES

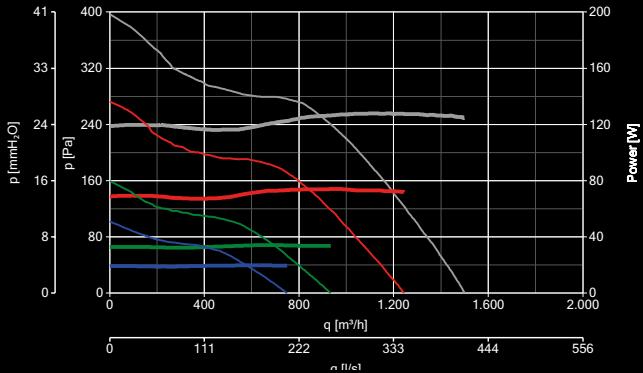

LINEO 315 ES

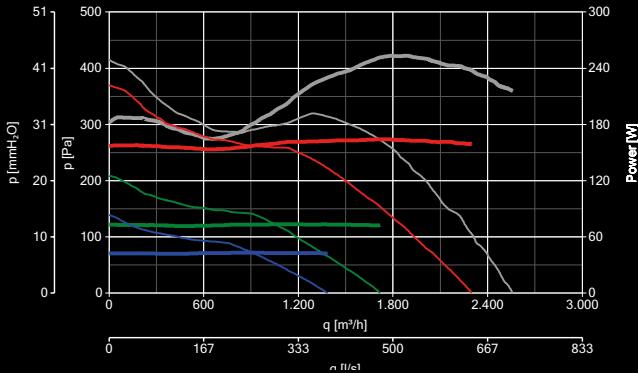

NEW

LINEO ES RANGE

In-line mixed flow fans equipped with EC Brushless motors



CONTROLLERS - LINEO

MODELS	DESCRIPTION	CODE	PRODUCT
	C 0.5 - 5 SPEED CONTROLLER	12987	17180
	C 1.5 - ELECTRONIC SPEED CONTROLLER 1.5 A	12966	17180
	C 2.5 - ELECTRONIC SPEED CONTROLLER 2.5 A	12967	17181 - 17182
	KIT SCB5 - CONVERTS SCR5 TO A BUILT-IN VERSION	22483	12987 - 12966 - 12967
	KIT SCB - BUILT-IN CONTROLLER ADAPTOR	22481	12987 - 12966 - 12967
	POT-IT - POTENTIOMETER	12826	17158 - 17159 - 17179 - 17183 - 17187 17167 - 17168 - 17169
	POT - POTENTIOMETER	12828	17158 - 17159 - 17179 - 17183 - 17187 17167 - 17168 - 17169
	TRIO LINEO 503 - 3 SPEED DIPSWITCH	12891	17181 - 17177 - 17182
	C TEMP - THERMO SWITCH	12992	ALL PRODUCTS
	C SMOKE - AIR QUALITY SENSOR	12993	ALL PRODUCTS
	C HCS - HUMIDISTAT	12994	ALL PRODUCTS
	C PIR - PASSIVE INFRARED SENSOR	12998	ALL PRODUCTS
	C TIMER - TIMER	12999	ALL PRODUCTS

ACCESSORIES ON REQUEST - LINEO

MODELS	DESCRIPTION	CODE	PRODUCT
	LINEO-C - RANGE INSTALLATION KIT	100	22584
		125	22585
		150	22586
		160	22587
	LINEO-PF - PARALLEL INSTALLATION KIT	100	22577
		125	22578
		150	22579
		160	22581
	LINEO-SF 500 - BRACKET FOR SERIES APPLICATION	22593	17143 - 17184 - 17144 - 17185 - 17159 17158 - 17145 - 17186 - 17178 - 17146 17187 - 17179 - 17147 - 17188 - 17183 17148 - 17189 - 17180 - 17177 - 17167
	LINEO-SF 700 - BRACKET FOR SERIES APPLICATION	22594	17149 - 17197 - 17168 - 17169
	LINEO-G - PROTECTION GRILLE	100	22701
		125	22702
		150	22703
		160	22704
		200	22705
		250	22706
		315	22707
			17149 - 17197 - 17168
			17169





VORTICE GROUP COMPANIES

VORTICE S.P.A.

Strada Cerca, 2
Frazione di Zoate
20067 Tribiano
(Milan) Italy
Tel. (+39) 02 906991
Fax (+39) 02 90699625
vortice.com

VORTICE LIMITED

Beeches House-Eastern
Avenue Burton upon Trent
DE13 0BB United Kingdom
Tel. (+44) 1283 492949
Fax (+44) 1283 544121
vortice.ltd.uk

VORTICE INDUSTRIAL S.R.L.

Via B. Brugnoli 3,
37063 Isola della Scala
(Verona) Italy
Tel. (+39) 045 6631042
Fax (+39) 045 6631039
vorticeindustrial.com

CASALS VENTILACIÓN AIR INDUSTRIAL S.L.

Ctra. Campodon, s/n 17860
Sant Joan de les
Abadesses
(Girona) Spain
Tel. (+34) 972720150
casals.com

VORTICE LATAM S.A.

Bodega #6
Zona Franca Este Alajuela,
Alajuela 20101
Costa Rica
Tel. (+506) 2201 6934
vortice-latam.com

VORTICE

VENTILATION SYSTEM
(Changzhou) Co.LTD
No. 388 West Huanghe Road
Building 19, Changzhou
Post Code: 213000 China
Tel. (+86) 0519 88990150
Fax (+86) 0519 88990151
vortice-china.com

The descriptions and illustrations in this catalogue are intended to be indicative and not binding. Without prejudice to the essential characteristics of the products described and illustrated here, VORTICE reserves the right to make, at any time and without notice, changes to parts, aesthetic details or supply of accessories to its products that are deemed to be appropriate for improvement or for any construction or commercial requirement.

This printout completely cancels and replaces all the previous ones

code 5.170.08 4.704 - Dicember 2020