



VMC AND HEAT RECOVERY

VORTICE.COM

VORT MONO RANGE



MADE IN ITALY

Range of decentralized heat recovery units, enhanced with new models with WI-FI module, able to establish mutual communication among products via local MESH network.


VORTICE



VORTICE S.p.A. is part of a multinational group, **VORTICE GROUP**, which operates through its own companies or local distributors in over 90 countries worldwide and has a rich product portfolio that guarantees air quality and climate comfort. The headquarters of VORTICE S.p.A are in Tribiano (Milan).



VORTICE GROUP also includes:

[1]
VORTICE LIMITED, the UK subsidiary of VORTICE S.p.A., established in 1977 and based in Burton on Trent.

[2]
VORTICE INDUSTRIAL, born from the acquisition in 2010 of Loran srl, based in Isola della Scala (VR).

[3]
VORTICE VENTILATION SYSTEM, a company inaugurated in 2013 with headquarters in Changzhou, China.

[4]
VORTICE LATAM S.A., based in Alajuela in Costa Rica, established in 2012.

[5]
CASALS VENTILACIÓN AIR INDUSTRIAL S.L., historic Spanish brand, based in Sant Joan de les Abadesses, Girona, acquired in 2019.

With the development and evolution of this technology, VORTICE takes a further step towards the future, confirming its commitment to the value that has always distinguished the company: improving the well-being of people by improving the air they breathe.

HEAT RECOVERY TECHNOLOGY

Heat recovery or controlled mechanical ventilation (MCV) is a technology that through devices equipped with latest generation, variable speed, low consumption and low noise extractor fans, guarantees:

- The introduction into the rooms of fresh air sucked in from the outside and suitably filtered.
- The expulsion of stale air from the inside.
- The recovery of the energy contained in the expulsion air through a high efficiency exchanger, transferring it to the air introduced into the rooms.

Thanks to this technology, we optimize the energy efficiency of the buildings in which we live and reduce heating and air conditioning costs, but above all we guarantee well-being and living comfort. Furthermore, through proper ventilation and air exchange, we significantly reduce the risk of infection transmitted by air, protecting our health.

Regulatory standards

The products of the VORT MONO range comply with the following European Standards, Directives and Regulations:


- Electrical Safety Regulations: EN 60335-1; EN 60335-2-80; EN 60529; EN 62233;
- Aeratic Performances Regulations: UNI EN ISO 5810;
- Electromagnetic Compatibility Regulations: EN 55014-1 EN 55014-2 EN 61000-3-2 EN 61000-3-3
- European Directives for CE marking
- Low Voltage Directive (2006/42/EC)
- Electromagnetic Compatibility Directive (2004/108/EC)
- RED Radio Equipment Directive (2014/53/EU)
- ErP 2009/125/EC Ecocompatible Design Directive according to the following regulations:
- European Regulation No. 1253/2014/EU Residential Ventilation Units



VORT HRW MONO Wi-Fi

DECENTRALIZED HEAT RECOVERY UNITS WITH Wi-Fi MODULE
ABLE TO ESTABLISH MUTUAL COMMUNICATION AMONG PRODUCTS
VIA LOCAL MESH NETWORK

RANGE EXPANSION

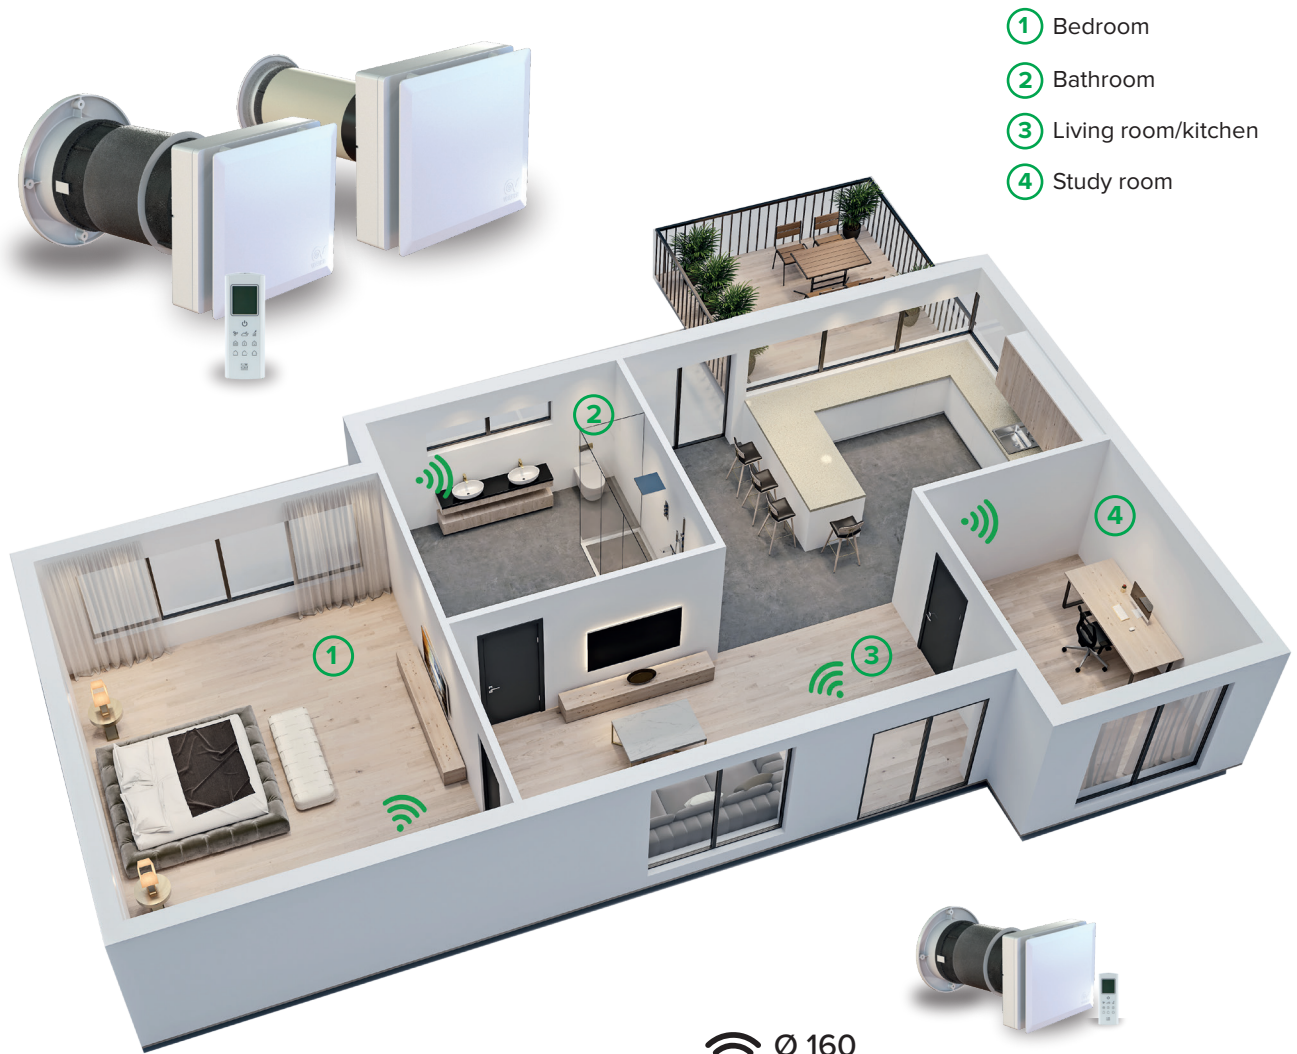


4



Ø 100

VORT HRW 30 MONO EVO Wi-Fi
Code 12441
On-board controls




VORT HRW 30 MONO EVO HCS Wi-Fi
Code 12443
With remote control and relative
humidity, temperature and light sensor



Ø 160

VORT HRW 60 MONO EVO HCS Wi-Fi
Code 12432
With remote control and relative humidity,
temperature and light sensor



VORT HRW 40 MONO EVO Wi-Fi
Code 12442
On-board controls



VORT HRW 40 MONO EVO HCS Wi-Fi
Code 12444
With remote control and relative
humidity, temperature and light sensor

MADE IN ITALY

INSTALLER BENEFITS

01

Easy installation

Low weight: 3.10 kg - 3.30 kg

Universal duct connection nominal Ø 100-160 mm.

Can be installed on perimeter walls between 260 mm and 700 mm thick

No condensation drains required.

No wired connection in case of installation of multiple products.

Easy to operate manual closing system, with machine closing indicator (red lever)

02

Easy maintenance

Easily accessible internal components.

USER BENEFITS

01

Clean air in all the rooms in an “intelligent” and cost-effective way.

The Wi-Fi module is able to establish a mutual communication among VORT HRW MONO Wi-Fi, without installing a router and issuing any contract with an Internet provider, instead through a local MESH network, without the need for a wired connection among the products.

Therefore, there will be:

- the introduction into the rooms of fresh and filtered air taken from the outside
- the expulsion of stale air from the inside
- the recovery of the energy contained in the expulsion air through a high efficiency exchanger, transferring it to the air introduced into the rooms.

02

Stylish design

It integrates perfectly into any residential environment.

04

Silent

Sound pressure levels at 3m:

19dB(A) first speed

25.4dB(A) third speed

31.8dB(A) fifth speed

(equivalent to a whisper from 1 m away)

05

Low consumption

<5 W at maximum flow rate

03

High efficiency 90%

High heat exchange efficiency values up to 90% at minimum flow rate.

VORT MONO RANGE

Decentralized heat recovery units.

Ventilation unit with heat recovery specifically designed for the exchange of air in residential and commercial premises, newly built or renovated, characterized by high levels of thermal insulation.

Can be installed on perimeter walls between 260 mm and 700 mm thick. Available in the manual control version, in the variants with controls on the machine and the version with remote control and relative humidity, temperature and ambient light sensors.



Ø 160

VORT HRW 40 MONO EVO
Code 12435
On-board controls

VORT HRW 40 MONO EVO HCS
Code 12437
With remote control and relative humidity, temperature and light sensor

VORT HRW 60 MONO EVO HCS
Code 12431
With remote control and relative humidity, temperature and light sensor

Ø 100

VORT HRW 30 MONO EVO
Code 12434
On-board controls

VORT HRW 30 MONO EVO HCS
Code 12436
With remote control and relative humidity, temperature and light sensor

MADE IN ITALY



INSTALLER BENEFITS

01

Easy installation

Low weight: 3.10 kg - 3.30 kg

Universal duct connection
Ø nominal 100-160 mm.

No condensation drains required.

Easy to operate manual closing system, with
machine closing indicator (red lever)

02

Easy maintenance

Easily accessible
internal components.

USER BENEFITS

7

01

Clean air in all the rooms in a cost-effective way.

These products ensure:

- the introduction into the rooms of fresh and filtered air taken from the outside
- the expulsion of stale air from the inside
- the recovery of the energy contained in the expulsion air through a high efficiency exchanger, transferring it to the air introduced into the rooms.

03

Stylish design

It integrates perfectly into any residential environment.

02

High efficiency 90%

High heat exchange efficiency values up to 90%
at minimum flow rate.

04

Low consumption

<5 W at maximum flow rate

05

Silent

Sound pressure levels at 3m:
19dB(A) first speed
25.4dB(A) third speed
31.8dB(A) fifth speed
(equivalent to a whisper from 1m away)


VORT HRW 30 MONO EVO HCS - Wi-Fi

VORT HRW 30 MONO EVO - HCS

Decentralized heat recovery units Ø 100 mm, with on-board controls or with remote control and HCS sensor. **Also available with Wi-Fi module.**

WALL INSTALLATION FLANGE WITH PRE-INSTALLED TERMINAL BLOCK.
THE PROTECTION CLASS OF THE TERMINAL BLOCK ALLOWS AN INEXPERIENCED USER TO REMOVE THE FAN BODY AND TO PROCEED WITH THE REMOVAL AND CLEANING OF THE EXCHANGE PACK, OF THE G3 FILTER AND TO RESET THE SYSTEM.

EXCHANGE PACK OF THE ACCUMULATION TYPE, MADE OF CERAMIC MATERIAL WITH ASSEMBLED EXTERNAL FILTER.

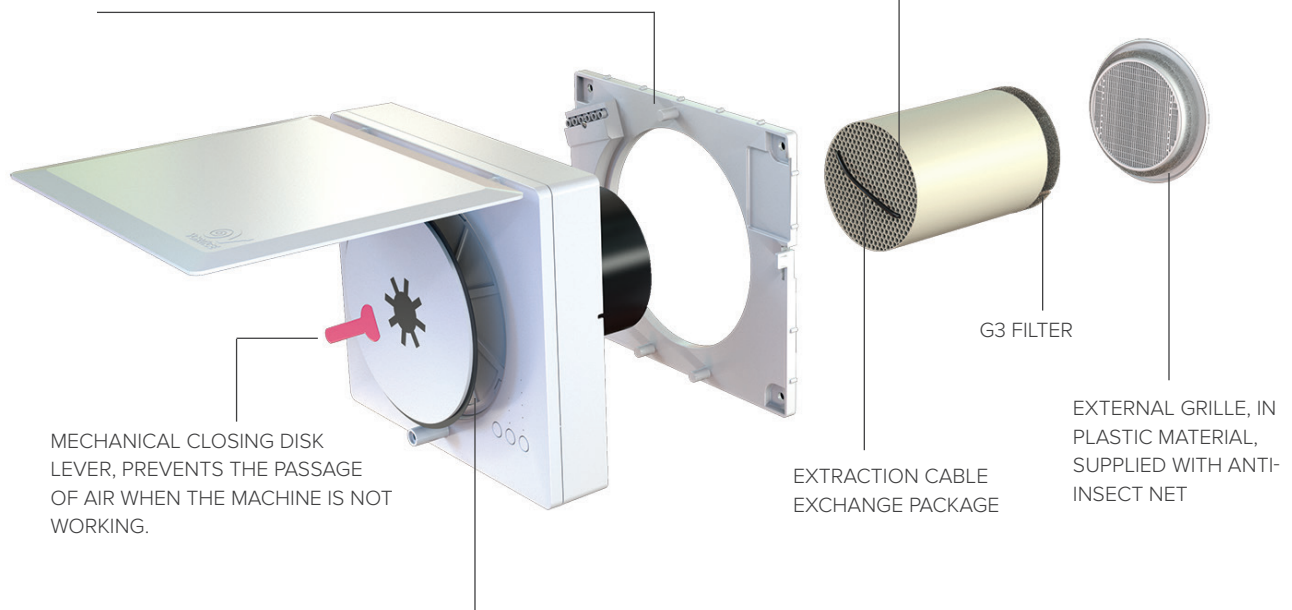

CO-MOLDED FRONT DISC:
IT HELPS TO ATTENUATE THE SOUND WAVE CREATED BY THE VENTILATING MACHINE AND BY THE AIR FLOW DURING THE INTRODUCTION INTO THE ENVIRONMENT. ITS SURFACE WITH SPHERICAL CAPS TENDS TO REFLECT THE NOISE IN DIFFERENT DIRECTIONS, REDUCING ITS EFFECT.



BY REMOVING THE FRONT DISC, IT IS POSSIBLE TO ACCESS THE DUST FILTER THAT PROTECTS THE EXCHANGER FROM THE INSIDE AND BY REMOVING IT CAN BE EASILY CLEANED OR REPLACED



LED
EXTRACTION/AUTO COMFORT

LED
INTRODUCTION/AUTO HR%

LED
RECOVERY/AUTO NIGHT

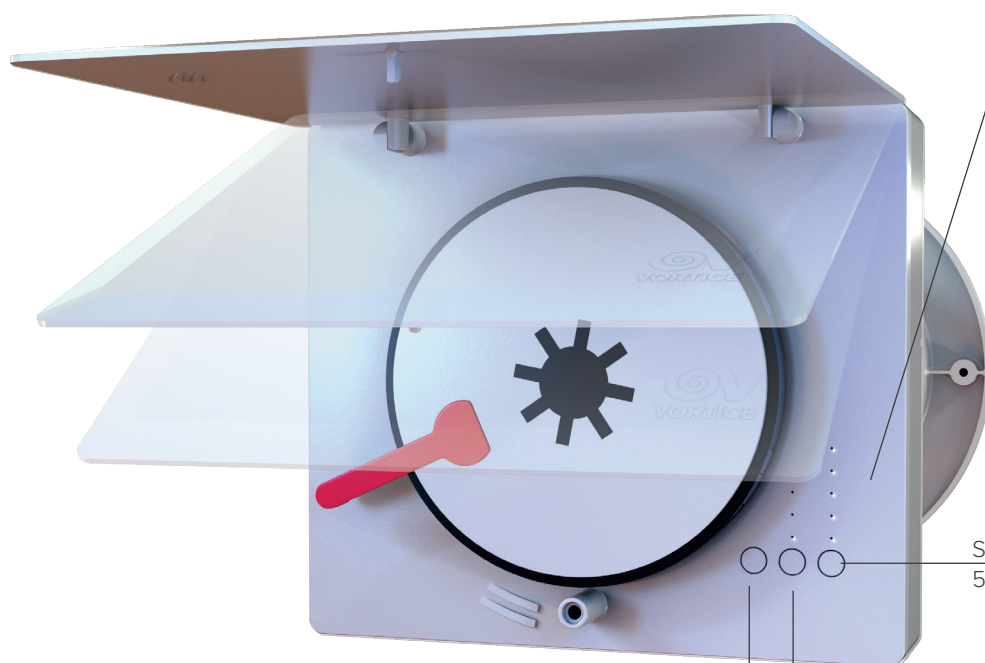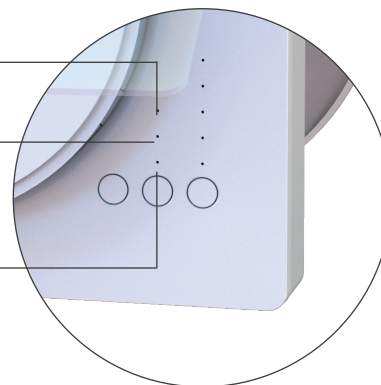

FUNCTION BUTTON
To activate or deactivate the 3 different AUTO functions available and activate or deactivate the stand-by mode

SPEED BUTTON
5-position selector

MODE BUTTON
3-position selector
Selects the recovery:
 • inlet
 • extraction
 • natural ventilation modes

VORT HRW 40 MONO EVO HCS - Wi-Fi

VORT HRW 40 MONO EVO - HCS

Decentralized heat recovery units Ø 160 mm, with on-board controls or with remote control and HCS sensor. **Also available with Wi-Fi module.**

WALL INSTALLATION FLANGE WITH PRE-INSTALLED TERMINAL BLOCK.
THE PROTECTION CLASS OF THE TERMINAL BLOCK ALLOWS AN INEXPERIENCED USER TO REMOVE THE FAN BODY AND TO PROCEED WITH THE REMOVAL AND CLEANING OF THE EXCHANGE PACK, OF THE G3 FILTER AND TO RESET THE SYSTEM.

THE POLYPROPYLENE RINGS FEATURE SOME PROTUBERANCES FOR THE ALIGNMENT OF THE FRONT SURFACE OF THE EXCHANGER WITH THE OUTLET/INLET OF THE FAN AND THE CORRECT INCLINATION OF THE EXCHANGER WITH RESPECT TO THE CONTAINMENT PIPE INSERTED IN THE WALL

10

MECHANICAL CLOSING DISK LEVER, PREVENTS THE PASSAGE OF AIR WHEN THE MACHINE IS NOT WORKING.

EXTRACTION CABLE EXCHANGE PACKAGE

ANTI-INSECT GRID REMOVABLE AND CLEANABLE BY THE USER FROM INSIDE THE HOUSE

EXTERNAL GRILLE IN TPV RUBBER

CO-MOLDED FRONT DISC:
IT HELPS TO ATTENUATE THE SOUND WAVE CREATED BY THE VENTILATING MACHINE AND BY THE AIR FLOW DURING THE INTRODUCTION INTO THE ENVIRONMENT.
ITS SURFACE WITH SPHERICAL CAPS TENDS TO REFLECT THE NOISE IN DIFFERENT DIRECTIONS REDUCING ITS EFFECT.

BY REMOVING THE FRONT DISC, IT IS POSSIBLE TO ACCESS THE DUST FILTER THAT PROTECTS THE EXCHANGER FROM THE INSIDE AND BY REMOVING IT CAN BE EASILY CLEANED OR REPLACED





Remote control for model HCS

LED
EXTRACTION/AUTO COMFORT

LED
INTRODUCTION/AUTO HR%

LED
RECOVERY/AUTO NIGHT

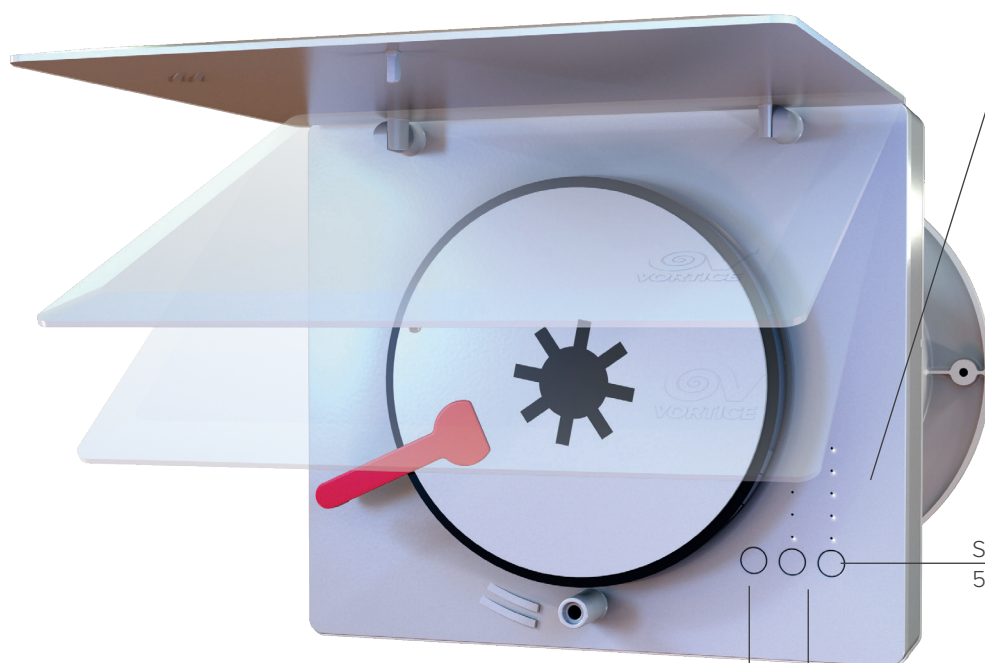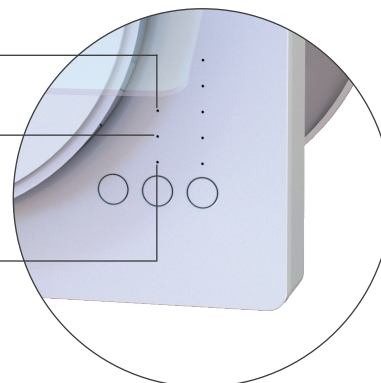

FUNCTION BUTTON
To activate or deactivate the 3 different AUTO functions available and activate or deactivate the stand-by mode


SPEED BUTTON
5-position selector

MODE BUTTON
3-position selector
Selects the recovery:


- inlet
- extraction
- natural ventilation modes

INSTALLATIONS

VORT HRW 30 MONO EVO HCS - Wi-Fi  - VORT HRW 30 MONO EVO - HCS
It must be mounted inside a perimeter wall with a thickness of at least 260 mm.

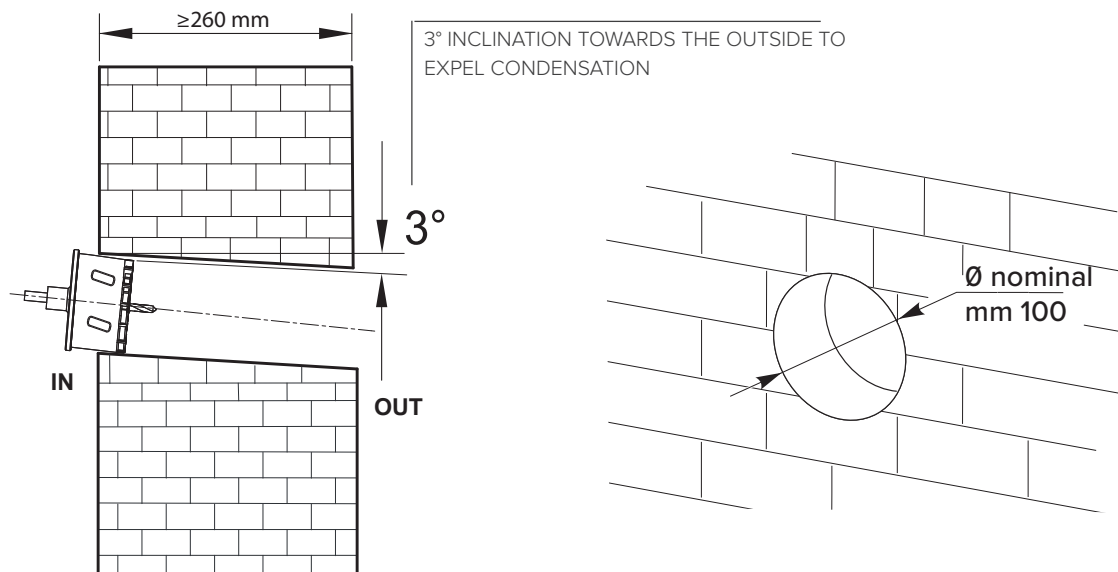

VORT HRW 40 - 60 MONO EVO HCS - Wi-Fi 
VORT HRW 40 - 60 MONO EVO - HCS
It must be mounted inside a perimeter wall with a thickness of at least 283 mm.

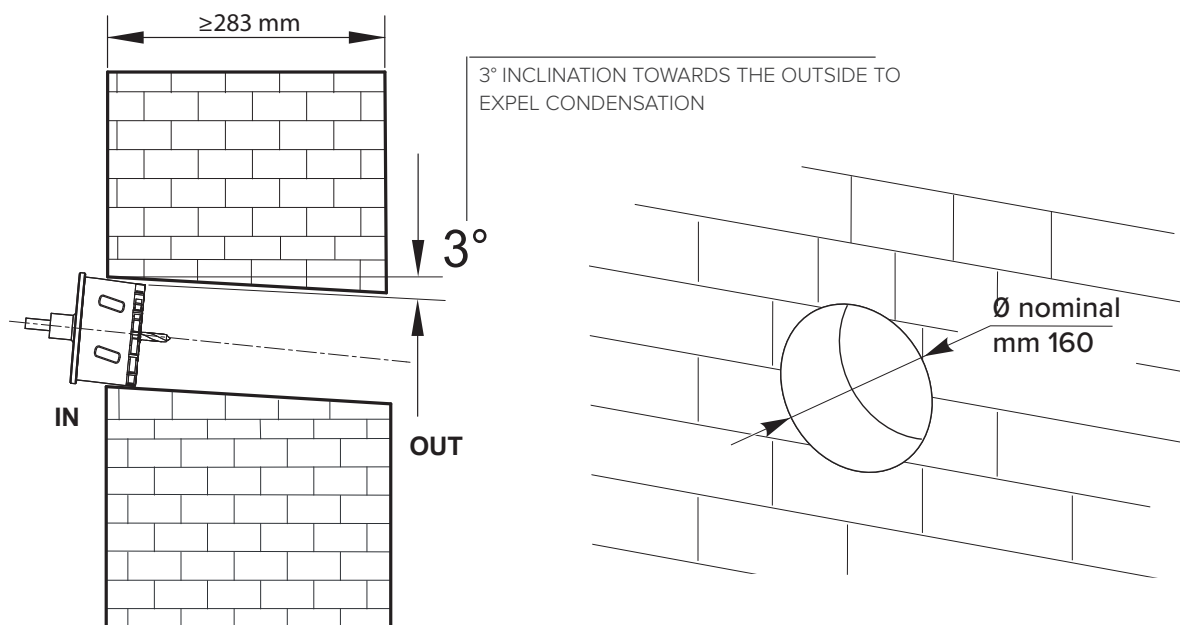

APPLICATIONS



TECHNICAL CHARACTERISTICS

8 models available

VORT HRW 30 MONO EVO HCS WI-FI

(code 12443) - Ø100 mm

With remote control and relative humidity, temperature and light sensors.

VORT HRW 40 MONO EVO HCS WI-FI

(code 12444) - Ø160 mm

With remote control and relative humidity, temperature and light sensors.

VORT HRW 30 MONO EVO

(code 12434) - Ø100 mm

With on-board controls.

VORT HRW 30 MONO EVO HCS

(code 12436) - Ø100 mm

With remote control and relative humidity, temperature and light sensors.

VORT HRW 40 MONO EVO

(code 12435) - Ø160 mm

With on-board controls.

VORT HRW 40 MONO EVO HCS

(code 12437) - Ø160 mm

With remote control and relative humidity, temperature and light sensors.

VORT HRW 60 MONO EVO HCS

(code 12431) - Ø160 mm

With remote control and relative humidity, temperature and light sensors.

VORT HRW 60 MONO EVO HCS WI-FI

(code 12432) - Ø160 mm

With remote control and relative humidity, temperature and light sensors.

Casing

Pressed wall casing made of aesthetic plastic resin, resistant to impacts and degradation induced by light; it integrates controls for switching the appliance on or off and regulating the operating modes and the treated flow. In the HCS models, it also integrates a relative humidity and light sensor for the automatic operation of the product.

Fan

The fans used on products of the VORT MONO RANGE comply with the European ErP Directive no. 2009/125.

Fan motors

EC motor fans, to guarantee very low consumption, powered by low voltage and with shafts mounted on ball bearings. Characterized by 5 operating speeds, for the best compromise between air flow rate, consumption and noise emission, they are designed to work in a clockwise and anti-clockwise direction, and thus allow the product to operate in the Intake, Ventilation and Ventilation with heat recovery modes.

Heat exchanger

High efficiency 90% storage heat exchangers, made of ceramic material of the hexagonal cell type to maximize the heat exchange surface. In winter operation (in summer the logic is reversed), thanks to the periodic inversion of the rotation direction of the motor fan, the exchange pack is cyclically heated by the extracted hot air and subsequently transfers most of this heat to the incoming cold renewal.

Filters

Washable G3 filters, easily accessible for maintenance/cleaning.

Pre-filters, housed on the internal side.

3 operating modes:

Ventilation with heat recovery:

the fan periodically reverses the direction of rotation for the transfer of the flow at a lower temperature than the heat previously accumulated in the exchanger.

Ventilation in extraction mode:

stale air, full of humidity, is expelled outside.

Ventilation in introduction mode:

external air, rich in oxygen and suitably filtered, is introduced into the room.

Grilles


External molded rubber grilles, fit from the inside through the hole in the target wall, to simplify the installation of the product.

The grilles include an easily removable insect net to simplify cleaning operations.

Insulation class: II

Grounding not required.

IR remote control (only for HCS model)

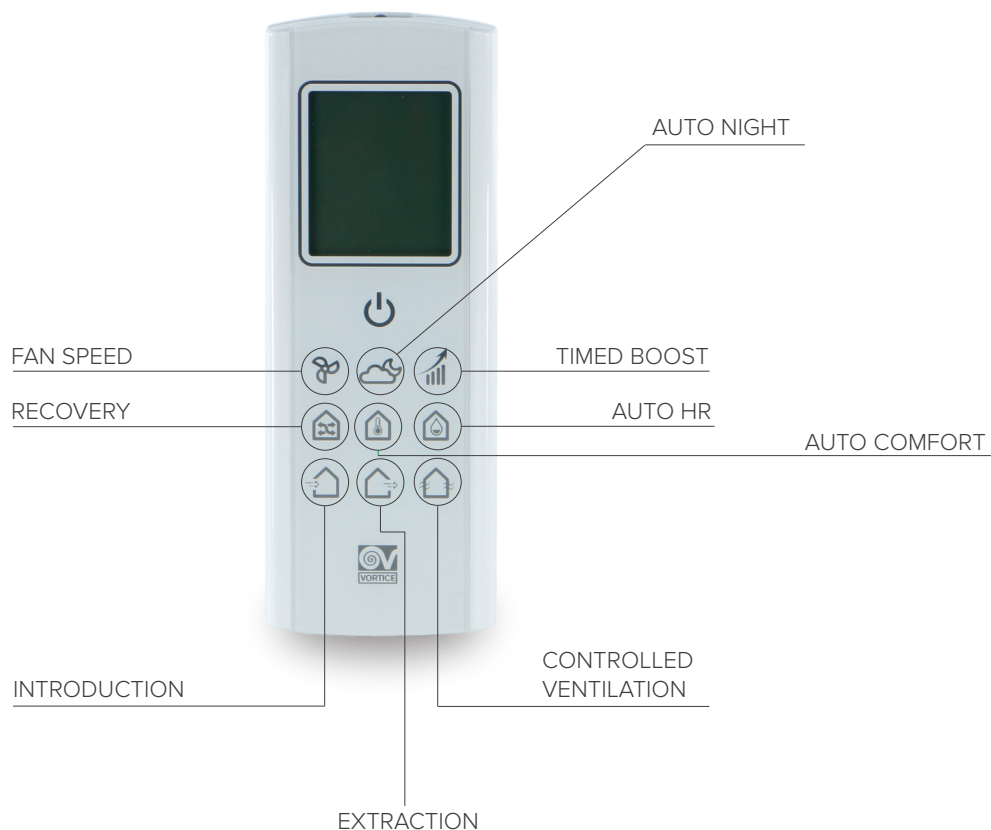

15

HCS models are supplied with remote control with LCD display.

By default the recovery function and the auto-comfort, auto HR% and auto night modes are active. The humidity threshold is set at the maximum value (90%) and the fan is set at maximum speed to obtain the maximum flow rate (5 fans displayed). The remote control transmits its default status to the product and updates the status on the appliance accordingly. If the status of the machine does not synchronize with the status of the remote control, point the remote control at the appliance and press a button on the remote control to activate the synchronization.

AUTO NIGHT

The ambient light sensor detects the presence or absence of light in the environment. Therefore, if it is night and no daylight is detected, the product will run at minimum speed and will not be allowed to go above minimum speed. When the presence of daylight is detected again, the product returns to operate at the previously set speed, and the switch to higher boost speeds is allowed via remote input or HR% sensor.

AUTO HR%


In case of humidity above the alarm threshold (60%, 75% or 90% - the default value is 75%), the extraction mode at maximum speed is automatically selected.

AUTO COMFORT


In heat recovery mode, the timing that determines the inverted rotation of the fans is fixed according to the temperature of the air released into the environment: if the weather is too cold the cycle time is reduced.

VORT MONO RANGE
DECENTRALIZED HEAT RECOVERY UNITS

Dimensions

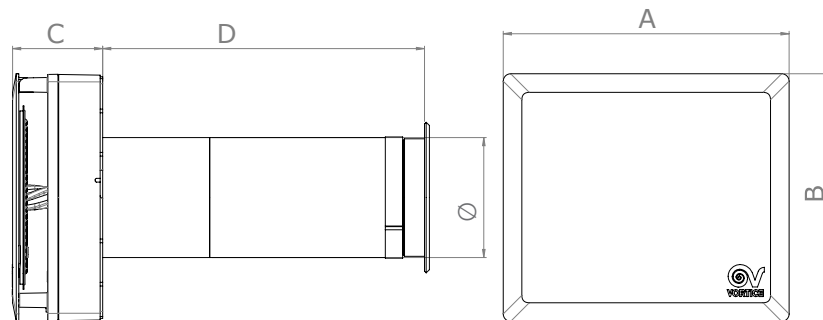

12434 VORT HRW 30 MONO EVO - **12436** VORT HRW 30 MONO EVO HCS
12443 VORT HRW 30 MONO EVO HCS Wi-Fi 📶

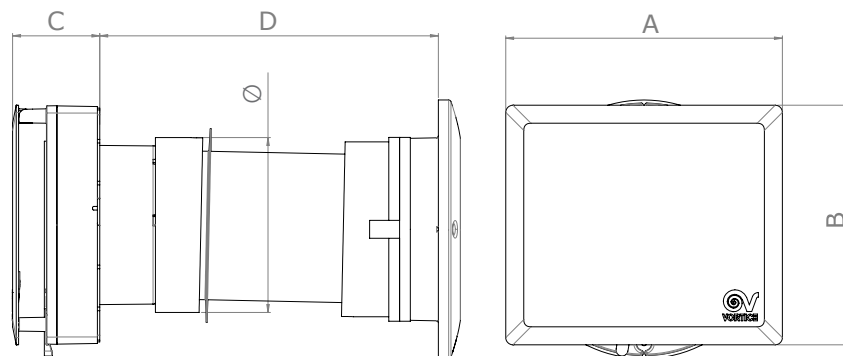




12435 VORT HRW 40 MONO EVO - **12437** VORT HRW 40 MONO EVO HCS
12431 VORT HRW 60 MONO EVO HCS - **12432** VORT HRW 60 MONO EVO HCS Wi-Fi 📶

PRODUCTS	A	B	C	D	Ø
VORT HRW 30 MONO EVO	231	200	73	260	97
VORT HRW 30 MONO EVO HCS	231	200	73	260	97
VORT HRW 40 MONO EVO	231	200	73	283	146
VORT HRW 40 MONO EVO HCS	231	200	73	283	146
VORT HRW 30 MONO EVO HCS Wi-Fi 📶	231	200	73	260	97
VORT HRW 40 MONO EVO HCS Wi-Fi 📶	231	200	73	283	146
VORT HRW 60 MONO EVO HCS	231	200	73	283	146
VORT HRW 60 MONO EVO HCS Wi-Fi 📶	231	200	73	283	146


Dimensions in mm

Technical data

PRODUCTS	CODE	V~50-60HZ	W max	A max	MAX FLOW RATE		MAX PRESSURE		LP DB (A) 3 m min/max	°C MAX	KG
					m ³ /h min/max	l/s min/max	mmH ₂ O min / max	Pa min/max			
VORT HRW 30 MONO EVO	12434	220-240	4	0.04	6 38	1.7 10.5	1 13.7	10 130	19.1 49.2	30	3.1
VORT HRW 30 MONO EVO HCS	12436	220-240	4	0.04	6 38	1.7 10.5	1 13.7	10 130	19.1 49.2	30	3.1
VORT HRW 40 MONO EVO	12435	220-240	5	0.05	15 40	4.2 11.1	1.7 4.8	17 47	19 31.8	30	3.3
VORT HRW 40 MONO EVO HCS	12437	220-240	5	0.05	14 40	4.2 11.1	1.7 4.8	17 47	19 31.8	30	3.3
VORT HRW 30 MONO EVO HCS Wi-Fi 	12443	220-240	4	0.04	6 38	1.7 10.5	1 13.7	10 130	19.1 49.2	30	3.1
VORT HRW 40 MONO EVO HCS Wi-Fi 	12444	220-240	5	0.05	15 40	4.2 11.1	1.7 4.8	17 47	19 31.8	30	3.3
VORT HRW 60 MONO EVO HCS	12431	220-240	7	0.07	10 60	6.9 16.6	1.5 12.2	12 120	12.7 47	30	3.3
VORT HRW 60 MONO EVO HCS Wi-Fi 	12432	220-240	8	0.08	15 40	6.9 16.6	1.5 12.2	15 20	12.7 47	30	3.3

Curves

12434 VORT HRW 30 MONO EVO - 12436 VORT HRW 30 MONO EVO HCS

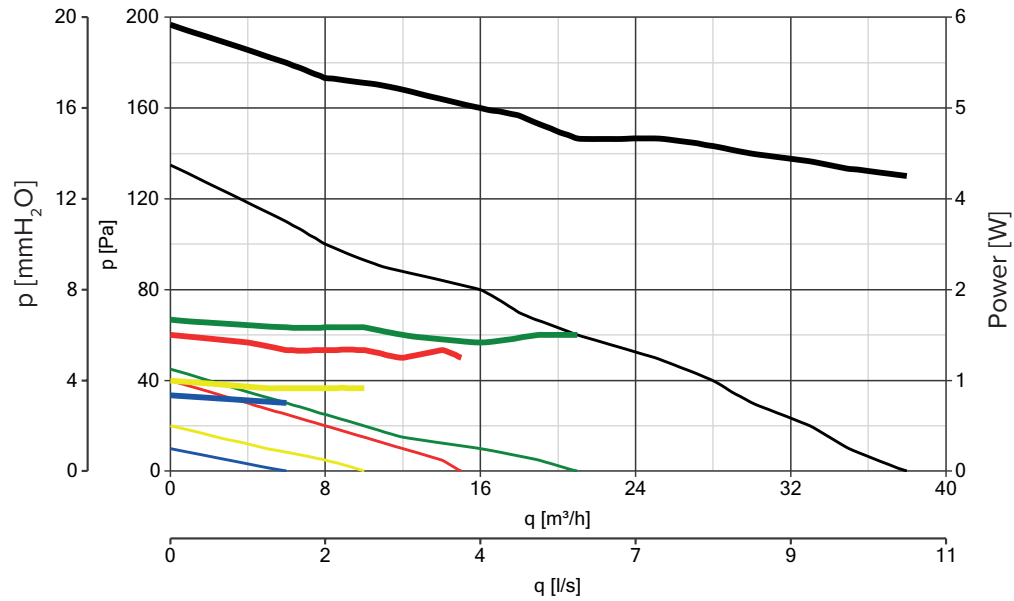

LEGEND:

NIGHT MODE

— Pressure
— Power

QUIET MODE

— Pressure
— Power

PERFORMANCE MODE

— Pressure
— Power

HIGH PERFORMANCE MODE

— Pressure
— Power

BOOST MODE

— Pressure
— Power

Energy data


	UNIT OF MEASURE	VORT HRW 30 MONO EVO CODE 12434	VORT HRW 30 MONO EVO HCS CODE 12436
MANUFACTURER'S NAME OR TRADE NAME	-	VORTICE	VORTICE
CLASS OF SPECIFIC ENERGY CONSUMPTION FOR TEMPERATE CLIMATE	-	A	A+
SPECIFIC ENERGY CONSUMPTION SEC (TEMPERATE CLIMATE)	kWh/m ² year	- 41.2	- 44.4
SPECIFIC ENERGY CONSUMPTION SEC (COLD CLIMATE)		- 85.4	- 89.5
SPECIFIC ENERGY CONSUMPTION SEC (WARM CLIMATE)		- 17.0	- 19.3
DECLARED TYPE OF THE VENTILATION UNIT	-	UVR-U**	UVR-U**
DRIVE TYPE	-	VM***	VM***
HRS TYPE HEAT EXCHANGER	-	recovery	recovery
THERMAL EFFICIENCY OF HEAT RECOVERY AT THE HRS REFERENCE FLOW RATE	%	89.0	89.0
MAXIMUM FLOW RATE	m ³ /h	35	35
TOTAL ELECTRIC POWER CONSUMED BY THE FAN AT MAXIMUM FLOW RATE	W	4	4
NOISE LEVEL	LWA [dB(A)]	53.1	53.1
REFERENCE FLOW RATE	m ³ /s	0.0097	0.0097
REFERENCE PRESSURE DIFFERENCE	Pa	10	10
SPI****	W/(m ³ /h)	0.11429	0.11429
CTRL CONTROL FACTOR	-	1	0.65
CONTROL TYPE	-	manual	local premise
MAXIMUM PERCENTAGE OF INTERNAL LEAKAGE	%	NA*	NA*
MAXIMUM PERCENTAGE OF EXTERNAL LEAKAGE	%	NA*	NA*
MIXING RATE	-	NA*	NA*
POSITION AND DESCRIPTION OF THE VISUAL FILTER SIGNAL	-	see instruction booklet	see instruction booklet
AIR FLOW SENSITIVITY TO PRESSURE VARIATIONS AT ± 20PA	-	0.48	0.48
INDOOR/OUTDOOR AIR TIGHTNESS	m ³ /h	0.0	0.0
AEC ANNUAL ELECTRICITY CONSUMPTION	kWh of electricity/year	157	83
TEMPERATE AHS ANNUAL HEATING SAVINGS	kWh of energy /year	4515	4650
COLD AHS ANNUAL HEATING SAVINGS		8901	9141
WARM AHS ANNUAL HEATING SAVING		2057	2113

* NA: Not applicable. ** UVR-U: Residential Ventilation Unit - Uni-directional. *** VM: Multiple speeds. VSD: Variable Speed Drive.

**** SPI: Specific power input.

Curves

12435 VORT HRW 40 MONO EVO - 12437 VORT HRW 40 MONO EVO HCS

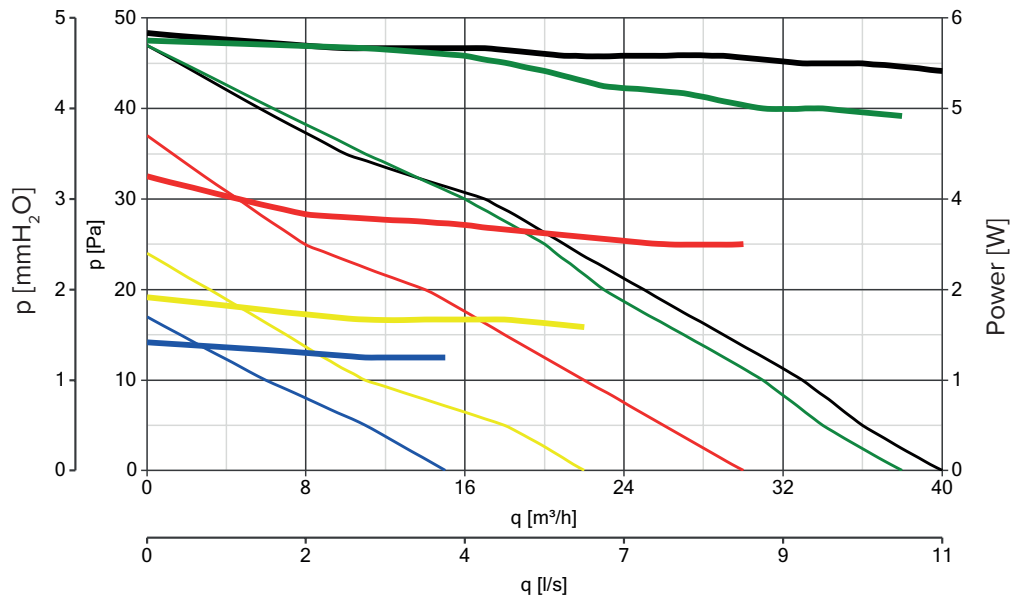

LEGEND:

NIGHT MODE

— Pressure
— Power

QUIET MODE

— Pressure
— Power

PERFORMANCE MODE

— Pressure
— Power

HIGH PERFORMANCE MODE

— Pressure
— Power

BOOST MODE

— Pressure
— Power

Energy data


	UNIT OF MEASURE	VORT HRW 40 MONO EVO CODE 12435	VORT HRW 40 MONO EVO HCS CODE 12437
MANUFACTURER'S NAME OR TRADE NAME	-	VORTICE	VORTICE
CLASS OF SPECIFIC ENERGY CONSUMPTION FOR TEMPERATE CLIMATE	-	A	A+
SPECIFIC ENERGY CONSUMPTION SEC (TEMPERATE CLIMATE)	kWh/m ² year	- 39.7	- 43.7
SPECIFIC ENERGY CONSUMPTION SEC (COLD CLIMATE)		- 84.1	- 88.8
SPECIFIC ENERGY CONSUMPTION SEC (WARM CLIMATE)		- 15.7	- 18.6
DECLARED TYPE OF THE VENTILATION UNIT	-	UVR-U**	UVR-U**
DRIVE TYPE	-	VM	VM
HRS TYPE HEAT EXCHANGER	-	recovery	recovery
THERMAL EFFICIENCY OF HEAT RECOVERY AT THE HRS REFERENCE FLOW RATE	%	89	89
MAXIMUM FLOW RATE	m ³ /h	32.6	32.6
TOTAL ELECTRIC POWER CONSUMED BY THE FAN AT MAXIMUM FLOW RATE	W	5.4	5.4
NOISE LEVEL	LWA [dB(A)]	48.1	48.1
REFERENCE FLOW RATE	m ³ /s	0.0085	0.0085
REFERENCE PRESSURE DIFFERENCE	Pa	10	10
SPI****	W/(m ³ /h)	0.15686	0.15686
CTRL CONTROL FACTOR	-	1	0.65
CONTROL TYPE	-	manual	local premise
MAXIMUM PERCENTAGE OF INTERNAL LEAKAGE	%	NA*	NA*
MAXIMUM PERCENTAGE OF EXTERNAL LEAKAGE	%	NA*	NA*
MIXING RATE	-	NA*	NA*
POSITION AND DESCRIPTION OF THE VISUAL FILTER SIGNAL	-	see instruction booklet	see instruction booklet
AIR FLOW SENSITIVITY TO PRESSURE VARIATIONS AT ± 20PA	-	0.48	0.48
INDOOR/OUTDOOR AIR TIGHTNESS	m ³ /h	0.0	0.0
AEC ANNUAL ELECTRICITY CONSUMPTION	kWh of electricity/year	216	113
TEMPERATE AHS ANNUAL HEATING SAVINGS	kWh of energy /year	4515	4650
COLD AHS ANNUAL HEATING SAVINGS		8901	9141
WARM AHS ANNUAL HEATING SAVING		2057	2113

* NA: Not applicable. ** UVR-U: Residential Ventilation Unit - Uni-directional. *** VM: Multiple speeds. VSD: Variable Speed Drive.

**** SPI: Specific power input.

Curves

12443 VORT HRW 30 MONO EVO HCS Wi-Fi

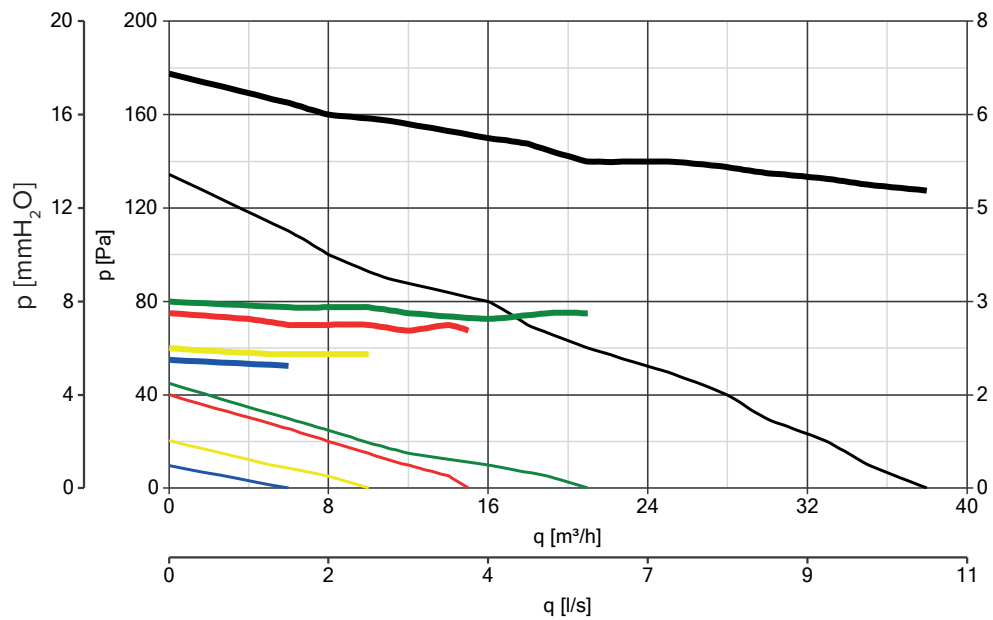

LEGEND:

NIGHT MODE

— Pressure
— Power

QUIET MODE

— Pressure
— Power

PERFORMANCE MODE

— Pressure
— Power


HIGH PERFORMANCE MODE

— Pressure
— Power

BOOST MODE

— Pressure
— Power

Energy data


	UNIT OF MEASURE	VORT HRW 30 MONO EVO HCS Wi-Fi  CODE 12443
MANUFACTURER'S NAME OR TRADE NAME	-	VORTICE
CLASS OF SPECIFIC ENERGY CONSUMPTION FOR TEMPERATE CLIMATE	-	A+
SPECIFIC ENERGY CONSUMPTION SEC (TEMPERATE CLIMATE)	kWh/m ² year	- 43,8
SPECIFIC ENERGY CONSUMPTION SEC (COLD CLIMATE)		- 89,0
SPECIFIC ENERGY CONSUMPTION SEC (WARM CLIMATE)		- 18,7
DECLARED TYPE OF THE VENTILATION UNIT	-	UVR-U**
DRIVE TYPE	-	VM***
HRS TYPE HEAT EXCHANGER	-	recovery
THERMAL EFFICIENCY OF HEAT RECOVERY AT THE HRS REFERENCE FLOW RATE	%	89.0
MAXIMUM FLOW RATE	m ³ /h	35
TOTAL ELECTRIC POWER CONSUMED BY THE FAN AT MAXIMUM FLOW RATE	W	5,2
NOISE LEVEL	LWA [dB(A)]	53.1
REFERENCE FLOW RATE	m ³ /s	0.0097
REFERENCE PRESSURE DIFFERENCE	Pa	10
SPI****	W/(m ³ /h)	0.14857
CTRL CONTROL FACTOR	-	0.65
CONTROL TYPE	-	local premise
MAXIMUM PERCENTAGE OF INTERNAL LEAKAGE	%	NA*
MAXIMUM PERCENTAGE OF EXTERNAL LEAKAGE	%	NA*
MIXING RATE	-	NA*
POSITION AND DESCRIPTION OF THE VISUAL FILTER SIGNAL	-	see instruction booklet
AIR FLOW SENSITIVITY TO PRESSURE VARIATIONS AT ± 20PA	-	0.48
INDOOR/OUTDOOR AIR TIGHTNESS	m ³ /h	0.0
AEC ANNUAL ELECTRICITY CONSUMPTION	kWh of electricity/year	107
TEMPERATE AHS ANNUAL HEATING SAVINGS	kWh of energy /year	4650
COLD AHS ANNUAL HEATING SAVINGS		9141
WARM AHS ANNUAL HEATING SAVING		2113

* NA: Not applicable. ** UVR-U: Residential Ventilation Unit - Uni-directional. *** VM: Multiple speeds. VSD: Variable Speed Drive.

**** SPI: Specific power input.

Curves

12444 VORT HRW 40 MONO EVO HCS Wi-Fi

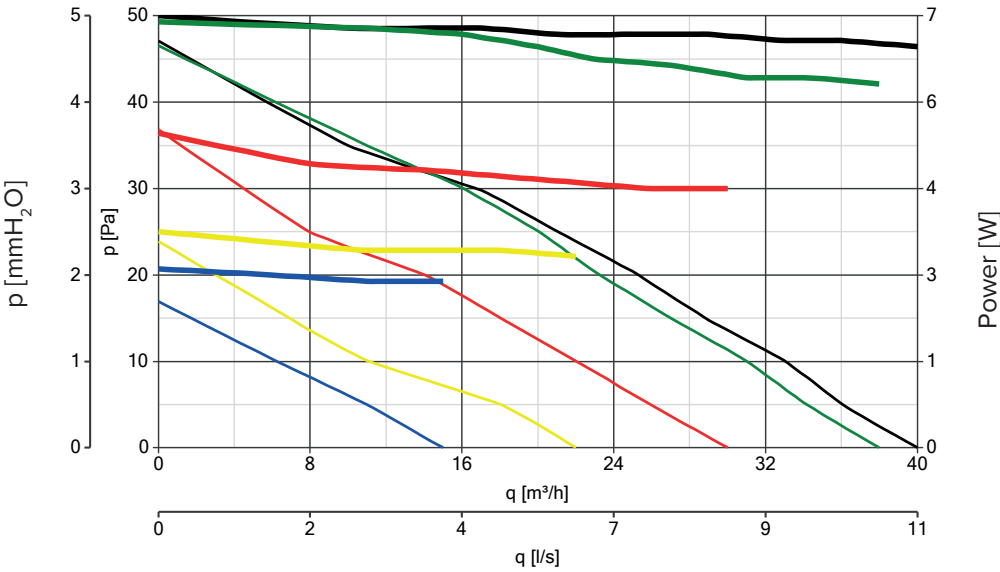

LEGEND:

NIGHT MODE

— Pressure
— Power

QUIET MODE

— Pressure
— Power

PERFORMANCE MODE

— Pressure
— Power


HIGH PERFORMANCE MODE

— Pressure
— Power

BOOST MODE

— Pressure
— Power

Energy data


	UNIT OF MEASURE	VORT HRW 40 MONO EVO HCS Wi-Fi  CODE 12444
MANUFACTURER'S NAME OR TRADE NAME	-	VORTICE
CLASS OF SPECIFIC ENERGY CONSUMPTION FOR TEMPERATE CLIMATE	-	A+
SPECIFIC ENERGY CONSUMPTION SEC (TEMPERATE CLIMATE)	kWh/m ² year	- 43,0
SPECIFIC ENERGY CONSUMPTION SEC (COLD CLIMATE)		- 88,2
SPECIFIC ENERGY CONSUMPTION SEC (WARM CLIMATE)		- 17,9
DECLARED TYPE OF THE VENTILATION UNIT	-	UVR-U**
DRIVE TYPE	-	VM
HRS TYPE HEAT EXCHANGER	-	recovery
THERMAL EFFICIENCY OF HEAT RECOVERY AT THE HRS REFERENCE FLOW RATE	%	89.0
MAXIMUM FLOW RATE	m ³ /h	32,6
TOTAL ELECTRIC POWER CONSUMED BY THE FAN AT MAXIMUM FLOW RATE	W	6,6
NOISE LEVEL	LWA [dB(A)]	48.1
REFERENCE FLOW RATE	m ³ /s	0.0085
REFERENCE PRESSURE DIFFERENCE	Pa	10
SPI****	W/(m ³ /h)	0.19608
CTRL CONTROL FACTOR	-	0.65
CONTROL TYPE	-	local premise
MAXIMUM PERCENTAGE OF INTERNAL LEAKAGE	%	NA*
MAXIMUM PERCENTAGE OF EXTERNAL LEAKAGE	%	NA*
MIXING RATE	-	NA*
POSITION AND DESCRIPTION OF THE VISUAL FILTER SIGNAL	-	see instruction booklet
AIR FLOW SENSITIVITY TO PRESSURE VARIATIONS AT ± 20PA	-	0.48
INDOOR/OUTDOOR AIR TIGHTNESS	m ³ /h	0.0
AEC ANNUAL ELECTRICITY CONSUMPTION	kWh of electricity/year	142
TEMPERATE AHS ANNUAL HEATING SAVINGS	kWh of energy /year	4650
COLD AHS ANNUAL HEATING SAVINGS		9141
WARM AHS ANNUAL HEATING SAVING		2113

* NA: Not applicable. ** UVR-U: Residential Ventilation Unit - Uni-directional. *** VM: Multiple speeds. VSD: Variable Speed Drive.

**** SPI: Specific power input.

Curves

12431 VORT HRW 60 MONO EVO HCS
12432 VORT HRW 60 MONO EVO HCS Wi-Fi

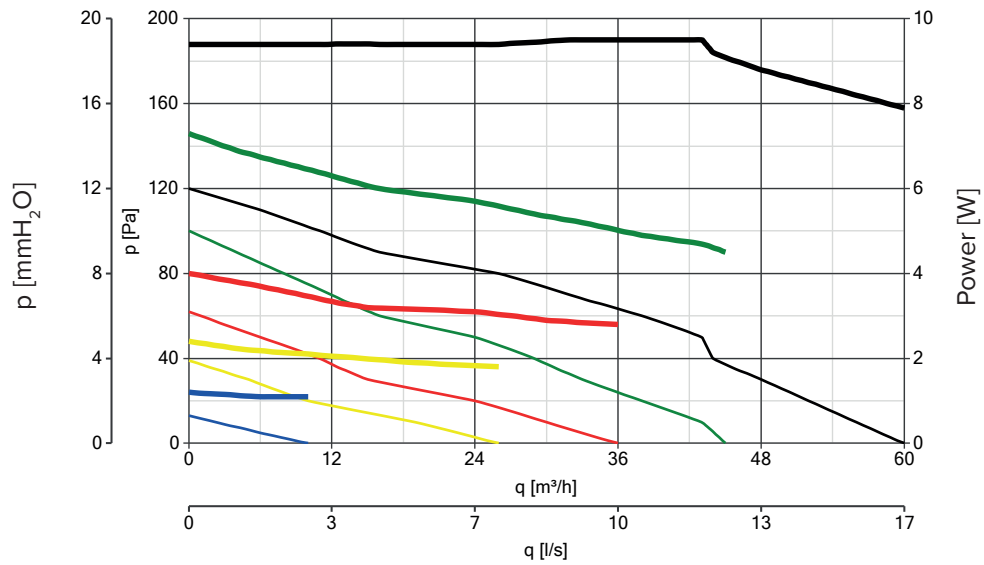

LEGEND:

NIGHT MODE

— Pressure
— Power

HIGH PERFORMANCE MODE

— Pressure
— Power

QUIET MODE

— Pressure
— Power


BOOST MODE

— Pressure
— Power

PERFORMANCE MODE

— Pressure
— Power

Energy data

	UNIT OF MEASURE	VORT HRW 60 MONO EVO HCS CODE 12431	VORT HRW 60 MONO EVO HCS Wi - Fi  CODE 12432
MANUFACTURER'S NAME OR TRADE NAME	-	VORTICE	VORTICE
CLASS OF SPECIFIC ENERGY CONSUMPTION FOR TEMPERATE CLIMATE	-	A+	A+
SPECIFIC ENERGY CONSUMPTION SEC (TEMPERATE CLIMATE)	kWh/m ² year	- 44.5	- 44
SPECIFIC ENERGY CONSUMPTION SEC (COLD CLIMATE)		- 89.1	- 89.1
SPECIFIC ENERGY CONSUMPTION SEC (WARM CLIMATE)		- 19.3	- 18.9
DECLARED TYPE OF THE VENTILATION UNIT	-	UVR-U**	UVR-U**
DRIVE TYPE	-	VM	VM
HRS TYPE HEAT EXCHANGER	-	recovery	recovery
THERMAL EFFICIENCY OF HEAT RECOVERY AT THE HRS REFERENCE FLOW RATE	%	89.0	89.0
MAXIMUM FLOW RATE	m ³ /h	56.0	56.0
TOTAL ELECTRIC POWER CONSUMED BY THE FAN AT MAXIMUM FLOW RATE	W	8.2	9.4
NOISE LEVEL	LWA [dB(A)]	56.5	56.5
REFERENCE FLOW RATE	m ³ /s	0.011861	0.011861
REFERENCE PRESSURE DIFFERENCE	Pa	10	10
SPI****	W/(m ³ /h)	0.11007	0.13817
CTRL CONTROL FACTOR	-	0.65	0.65
CONTROL TYPE	-	local premise	local premise
MAXIMUM PERCENTAGE OF INTERNAL LEAKAGE	%	NA*	NA*
MAXIMUM PERCENTAGE OF EXTERNAL LEAKAGE	%	NA*	NA*
MIXING RATE	-	NA*	NA*
POSITION AND DESCRIPTION OF THE VISUAL FILTER SIGNAL	-	see instruction booklet	see instruction booklet
AIR FLOW SENSITIVITY TO PRESSURE VARIATIONS AT ± 20PA	-	0.48	0.48
INDOOR/OUTDOOR AIR TIGHTNESS	m ³ /h	0.0	0.0
AEC ANNUAL ELECTRICITY CONSUMPTION	kWh of electricity/year	79	100
TEMPERATE AHS ANNUAL HEATING SAVINGS	kWh of energy /year	4650	4650
COLD AHS ANNUAL HEATING SAVINGS		9141	9141
WARM AHS ANNUAL HEATING SAVING		2113	2113

* NA: Not applicable. ** UVR-U: Residential Ventilation Unit - Uni-directional. *** VM: Multiple speeds. VSD: Variable Speed Drive.






**** SPI: Specific power input.

VORT MONO RANGE
DECENTRALIZED HEAT RECOVERY UNITS

Accessories

MODELS	DESCRIPTION	CODE	PRODUCTS
	MWS Ø 100 Windproof metal panel for outdoor use in stainless steel sheet	21883	12434 12436 12443
	WA Ø 100 90° round/square adapter for intake and discharge through the window jamb. Circular connection diameter 100 mm	21884	12434 12436 12443
	KIT FTR Filter kit	21891	12434 12436 12443
	PVC PIPE Ø 100	21879	12434 12436 12443
	C TEMP Ambient air temperature sensor	12992	12431 12432 12435 12437 12444
	C HCS Relative humidity (RH) sensor	12994	12431 12432 12435 12437 12444
	PVC PIPE Ø 160	22599	12435 12437 12444
	KIT FTR Filter kit	22466	12431 12432 12435 12437 12444



MODELS	DESCRIPTION	CODE	PRODUCTS
	MWS Outside stainless steel windshield panel	21148	12431 12432 12435 12437 12444
	RGR External rubber grille	21190	12435 12437 12444
	WSG-INOX Rectangular stainless steel grid for WA kit	21192	12431 12432 12435 12437 12444
	WSG-W Powder coated stainless steel rectangular grid for WA kit	21193	12431 12432 12435 12437 12444
	FTR M5 Filters	21926	12435 12437 12444
	WA 90° round/square adapter for intake and discharge through the window jamb. Circular attachment diameter for 160 mm	21191	12431 12432 12435 12437 12444

VORTICE GROUP COMPANIES

VORTICE S.P.A

Strada Cerca, 2
Frazione di Zoate
20067 Tribiano
(Milan) Italy
Tel. (+39) 02 906991
Fax (+39) 02 90699625
vortice.com

VORTICE LIMITED

Beeches House
Eastern Avenue
Burton on Trent
DE13 0BB United Kingdom
Tel. (+44) 1283-49.29.49
Fax (+44) 1283-54.41.21
vortice.ltd.uk

VORTICE INDUSTRIAL S.R.L.

Via B. Brugnoli 3,
37063 Isola della Scala
(Verona) Italy
Tel. (+39) 045 6631042
Fax (+39) 045 6631039
vorticeindustrial.com

CASALS VENTILACIÓN AIR INDUSTRIAL S.L.

Ctra. Camprodon, s/n 17860
Sant Joan de les Abadesses
(Girona) Spain
Tel. (+34) 972720150
casals.com

VORTICE LATAM S.A.

Bodega #6
Zona Franca Bes Alajuela,
Alajuela 20101
Costa Rica
Tel. (+506) 2201.6934
vortice-latam.com

VORTICE VENTILATION SYSTEM

(Changzhou) Co.LTD
No. 388 West Huanghe Road
Building 19, Changzhou
Post Code: 213000 China
Tel. (+86) 0519 88990150
Fax (+86) 0519 88990151
vortice-china.com

TOLL-FREE NUMBER

800 555 777

February 2023 - 5170.084.484

The descriptions and illustrations in this catalogue are intended to be indicative and not binding. Without prejudice to the essential characteristics of the products described and illustrated here, VORTICE reserves the right to make, at any time and without notice, any changes to parts, aesthetic details or supply of accessories to its products that are deemed to be appropriate for improvement or for any construction or commercial requirement.
This printout completely cancels and replaces all previous ones.

