

# Technical Data Sheet

CODE 12615

## VORTICE 150/6" AR-LL-S

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

|  |            |                                     |         |
|--|------------|-------------------------------------|---------|
| Absorbed Current max (A)                                   | 0,17       | Voltage (V)                         | 220-240 |
| Absorbed Power max (W)                                     | 35         | Weight (Kg)                         | 2,07    |
| Frequency (Hz)   | 50/60      | Delivery max - Extract (l/s)        | 105,6   |
| Inlet  | Automatico | Delivery max - Extract (m3/h)       | 380     |
| Insulation Class   | II°        | Delivery max - Intake (l/s)         | 59,7    |
| IP   | X4         | Delivery max - Intake (m3/h)        | 215     |
| Max absorbed Power at 60Hz (W)                             | 35         | Delivery max (m³/h)                 | 380     |
| Max ambient temperature for continuous operation (°C)      | 50         | RPM                                 | 2110    |
| Max ambient temperature for continuous operation 60Hz (°C) | 50         | Rpm - Exhaust                       | 2110    |
| Ø Discharge Hole (mm)                                      | 150        | Rpm - Supply                        | 2520    |
|  |            | Sound Pressure level Lp [dB (A)] 3m | 49,6    |

### DIMENSIONS

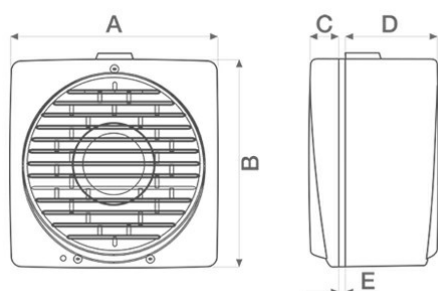

|              |         |
|--------------|---------|
| Ø glass hole | 185/190 |
| Ø wall hole  | 185/190 |
| Size A (mm)  | 215     |
| Size B (mm)  | 218     |
| Size C (mm)  | 31      |
| Size D (mm)  | 97,5    |
| Size E (mm)  | 2/38    |

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 12615

## VORTICE 150/6" AR-LL-S


Wall/window axial fans




### DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

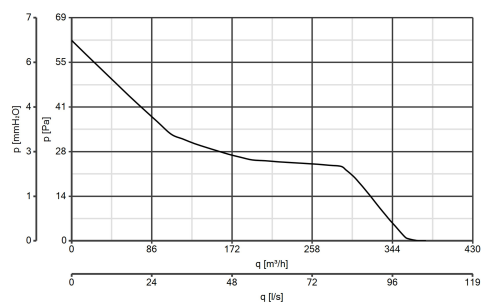

### ACCESSORIES



**KIT TE 150/6"**  
**(TORRETTA)**  
Code 13001



**KIT MU (MURO)**  
Code 13018



**KIT VV 150/6"**  
**(DOPPI VETRI)**  
Code 13021



**KIT FF 150/6"**  
**(DOPPIA  
FINESTRA)**  
Code 13024

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)