

## SLIMROOF 190 M ES (15272)

### GENERAL DATA



#### ROOF FAN WITH ELECTRONIC MOTOR AND ALUMINIUM COWL

##### MANUFACTURING FEATURES:

- Protection cowl made of anticorrosive treated aluminum easily removable for motor and impeller maintenance (integrated folding system in models 500, 560 and 630).
- The design of the cowl with a rounded shape is specific to minimize the risk of water ingress due to rain.
- Structure in anticorrosive galvanized steel and support frame for adaptation to the roof with anti-bird protection grid.
- High-efficiency backward-curved blade impeller with self-cleaning system. Reinforced polyamide impeller for models 155, 190 and 220. The rest of the models in aluminum.
- EC technology uses integral electronic control to ensure that the motor always runs at optimal load and ensures efficient energy utilization. It incorporates an external rotor EC motor with high efficiency (IE4 for three phase motors and IE5 for single motors) and low noise level. Speed control through a 0-10V or PWM signal. 230V 50/60Hz single-phase power supply for models 155 to 310 and 400V 50/60Hz three-phase power supply for sizes 355 and 630. IP54 and motor class B insulation.

##### APPLICATIONS


Designed for deck or roof mounting, they are indicated for:

- Smoke extraction.
- Air renewal in all types of buildings and industries.
- Working temperature range from -20°C to 60°C for models size 155-310, -25°C to 60°C for 355-450 sizes, -30°C to 50°C for size 500 and -30°C to 40°C for 560 and 630 models.

##### UNDER REQUEST

- Fan (size between 250 and 450) with k-factor reading.

## PERFORMANCE CURVE

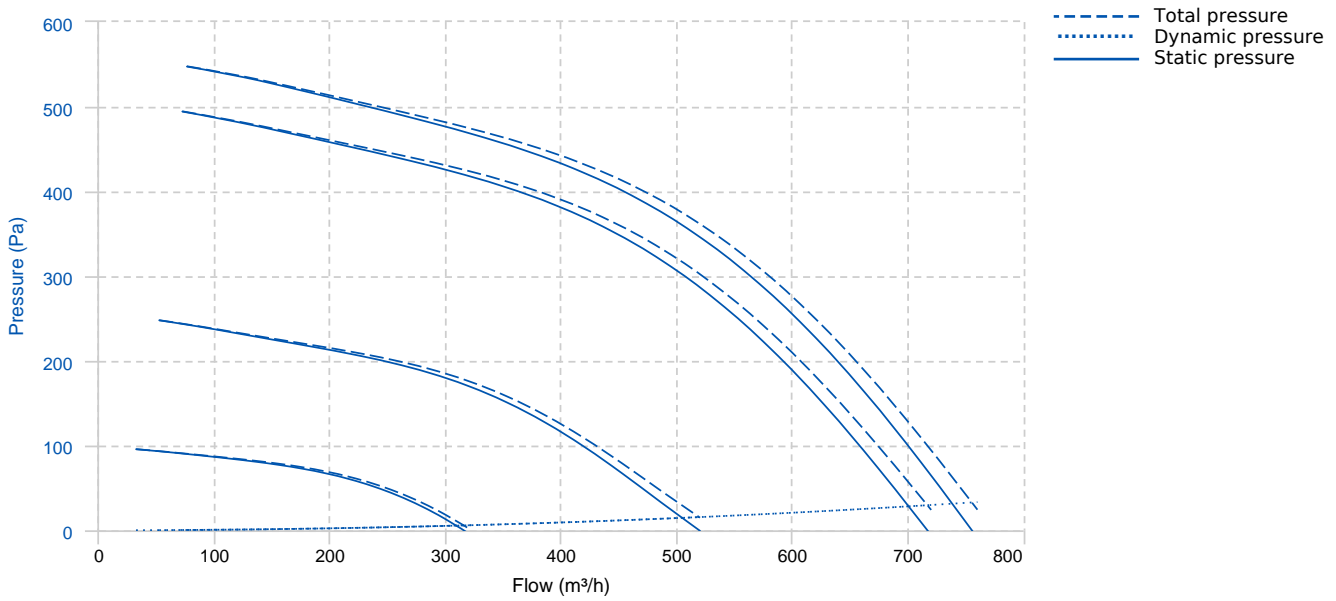

## TECHNICAL DATA



### Fan

RPM	3570	Approx. weight	7.6 kg	Max. Flow	760 m³/h
-----	------	----------------	--------	-----------	----------

### Motor

Power	0,09 kW	RPM	3570	I max. (230V)	0,6 A	Approx. weight	2.6 kg
-------	---------	-----	------	---------------	-------	----------------	--------

## DIMENSIONS

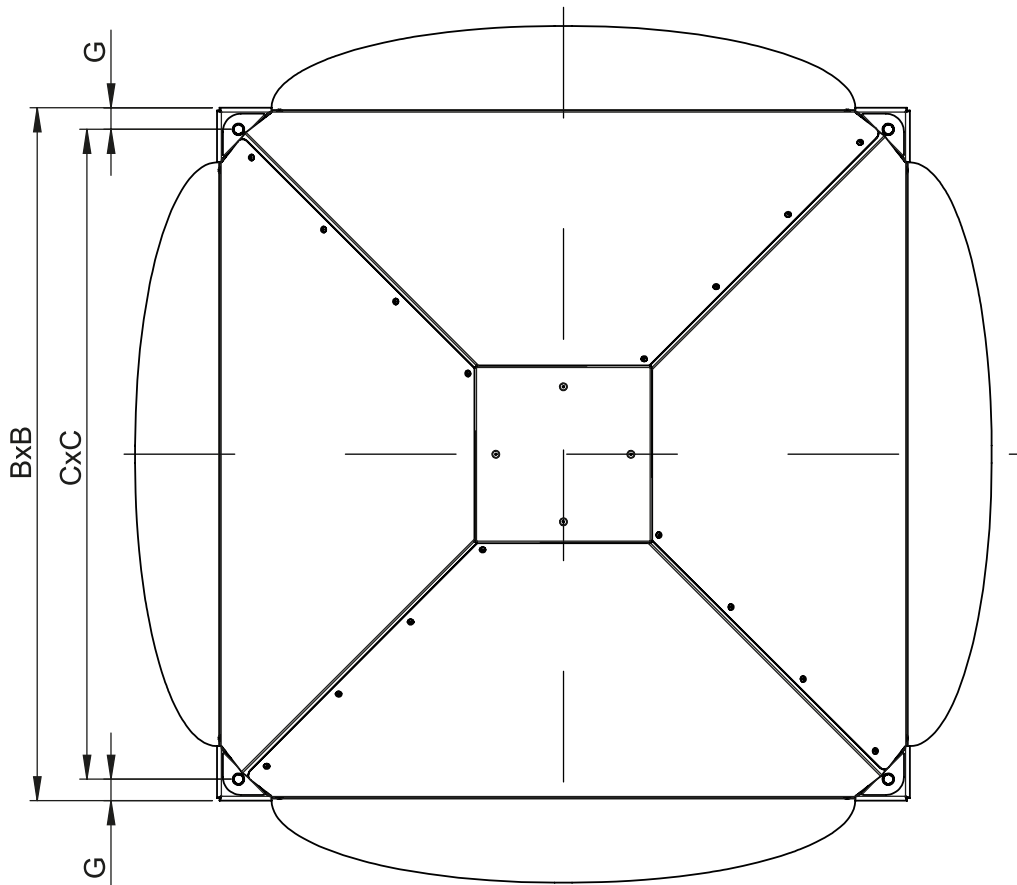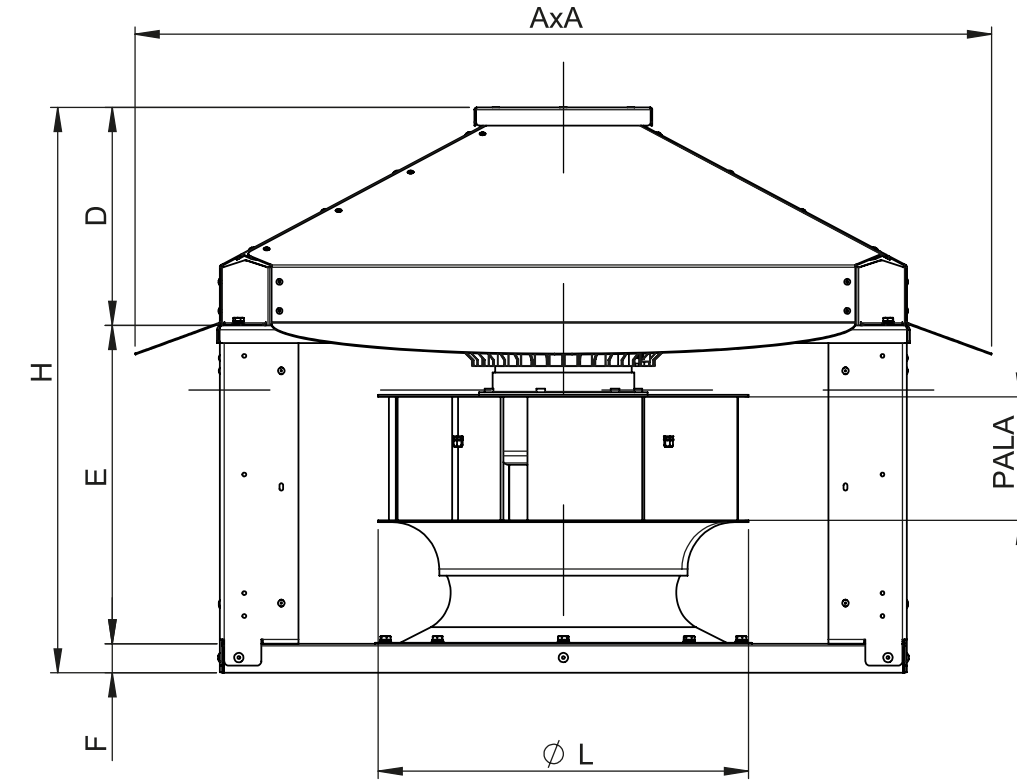


## Dimensions (mm)

A	435	B	350	C	310	D	120	E	80
F	30	G	19	H	230	PALA	43	ØL	190

## WIRING DIAGRAM

Nº	Signal Señal	Colour Color	Specification Especificación
1	L	Brown Marrón	AC 220V/50Hz
2	N	Blue Azul	AC 220V/50Hz
3	Pe	Yellow-Green Amarillo-Verde	

Nº	Signal Señal	Colour Color	Specification Especificación
1	GND	Blue Azul	
2	Vsp	Yellow Amarillo	0-10 V/PWM
3	Vcc	Red Rojo	DC 10V
4	FG	White Blanco	1 Pulse/R

## ACCESSORIES



**SAFETY SWITCH  
SWT 25 3P**  
REF: 21673



**SPEED CONTROLLER FOR EEC MOTOR  
POT (REGC)**  
REF: 12828 (20146)



**SPEED CONTROLLER WITH SAFETY SWITCH FOR  
EEC MOTOR  
PMR**  
REF: 20841



**ENKELROOF VERTICAL DISCHARGE  
KV SLIMROOF 155-190**  
REF: 20824




**BTI + AMC MOUNTED  
BTI+AMC 310 D=0 C=B**  
REF: 20863



**CONECTION FLANGE  
MFLAC 18/7**  
REF: 20231



**CIRCULAR-CIRCULAR ANTI-VIBRATION FLANGE  
BAD 5**  
REF: 20766



**INCLINED ROOF FAN SUPPORT  
BTI 310 D=0 C=B**  
REF: 20759



**CIRCULAR SOUND ATTENUATOR IN GALVANISED  
STEEL  
SILC-MINI 160 C**  
REF: 20818